

LINK

LINK - 1230110



LED solar lamp

Daylight sensor:

- activate at < 50 lux
- turn off at > 50 lux

IP65

Materials:

- die-casting aluminium, extruded aluminium
 - thermosetting epoxy polyester powder coating
 - stainless steel screws
 - clear polycarbonate diffuser
- Salt spray corrosion test: 800h

Charging time: 8-10h

Working time: 34-36h

Power: 5W

Lithium Battery: 4*2200 mAh (replaceable)

Battery level indicator

Solar panel:

- 9W monocrystalline
- tempered glass

LED: Lumileds 4014

Light colour temperature: 3000K

CRI>80


Inner box size: 28.5 x 11.5 x 47.5 cm

Master: 2 pieces

Master size: 49 x 30 x 25 cm

Net weight: 8.4 kg

Gross weight: 11.0 kg

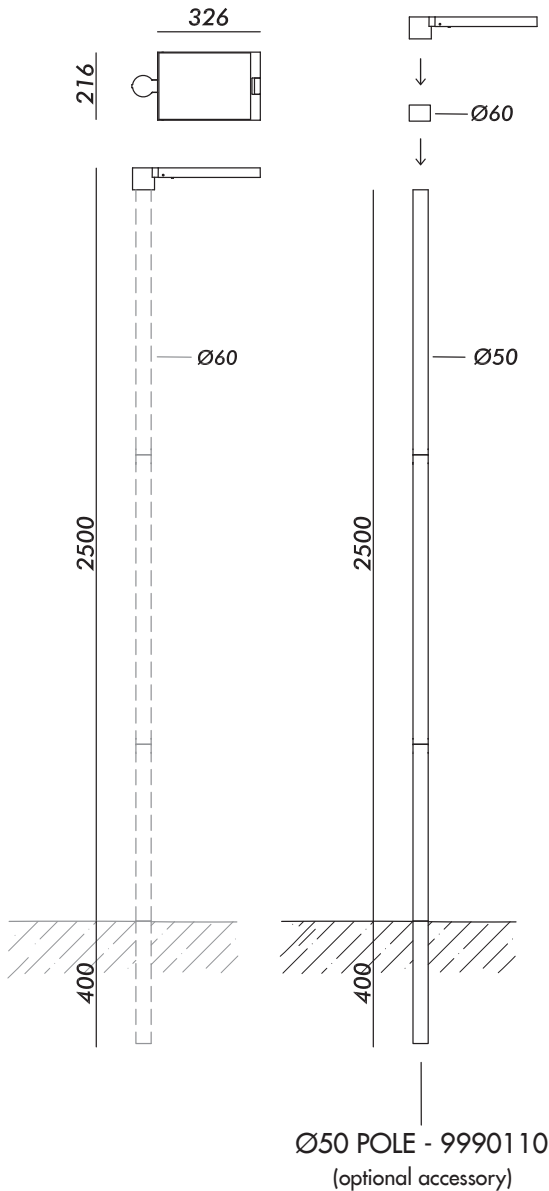


ISO LUX

LINK

Lux distribution

H:2.5m

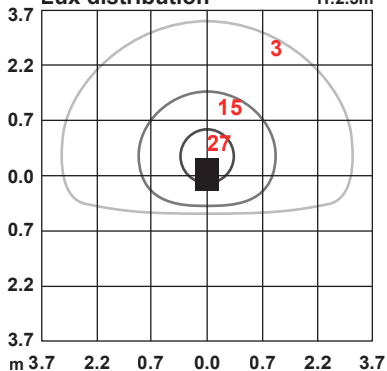

LUMENS/WORKING TIME

Lumens

