



Datasheet 4010801

Lichtschiene LUXI LINK Schiene 1000mm




Dimmable: yes

Our **LUXI LINK** is the minimalist among LED systems. LUXI LINK is the new slim light rail system from SIGOR. Using a simple plug-in system, the LED light rails can be flexibly and easily installed in any direction. Thanks to the diverse connectors, the variable feeders and, above all, the different lengths of the light rails, LUXI LINK is ideal for use wherever indirect light is desired. With the 90° connector, the system is also a perfect solution for furniture installation. LUXI LINK is suitable for fixed installation, but can also be installed quickly and easily up to a maximum length of 4m, ready to plug in. The light rails made of aluminum with opal glass cover have a warm white light color of 3,000K, ensure a homogeneous light distribution without light spots and are conveniently controllable via touch dimmer or gesture switch. Our LUXI LINK system comes with a 3-year functional warranty.

Recommended dimmer: www.sigor.de/dimmerliste

1.350 lm	luminous flux [lm]
15,00 Watt	rated power
3000 K	colour temperature
Ra>80	colour rendering
<5 sdcm	colour consistency
100°	beam angle
silber	Colour housing
IP20	type of protection
-20° - 40°C	temperature range in operation
1	power factor
24 V AC	voltage
50 Hz	operating frequency
60 mA	current
15 kWh/1000h	energy consumption
<0,3 s	warm-up time up to 60% of the full light output
<0,1 s	starting time
Ø 40.000 h	nominal life time
L70B50	rated life time L70/B50
0.9	lumen maintenance factor at the end of the nominal life

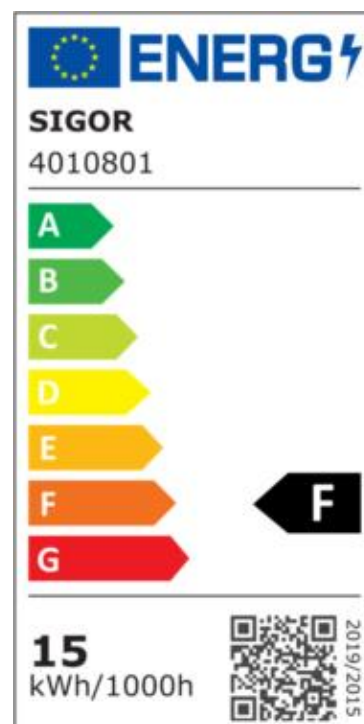


as of: 08.02.2022

Page: 1



4010801

Lichtschiene LUXI LINK Schiene 1000mm

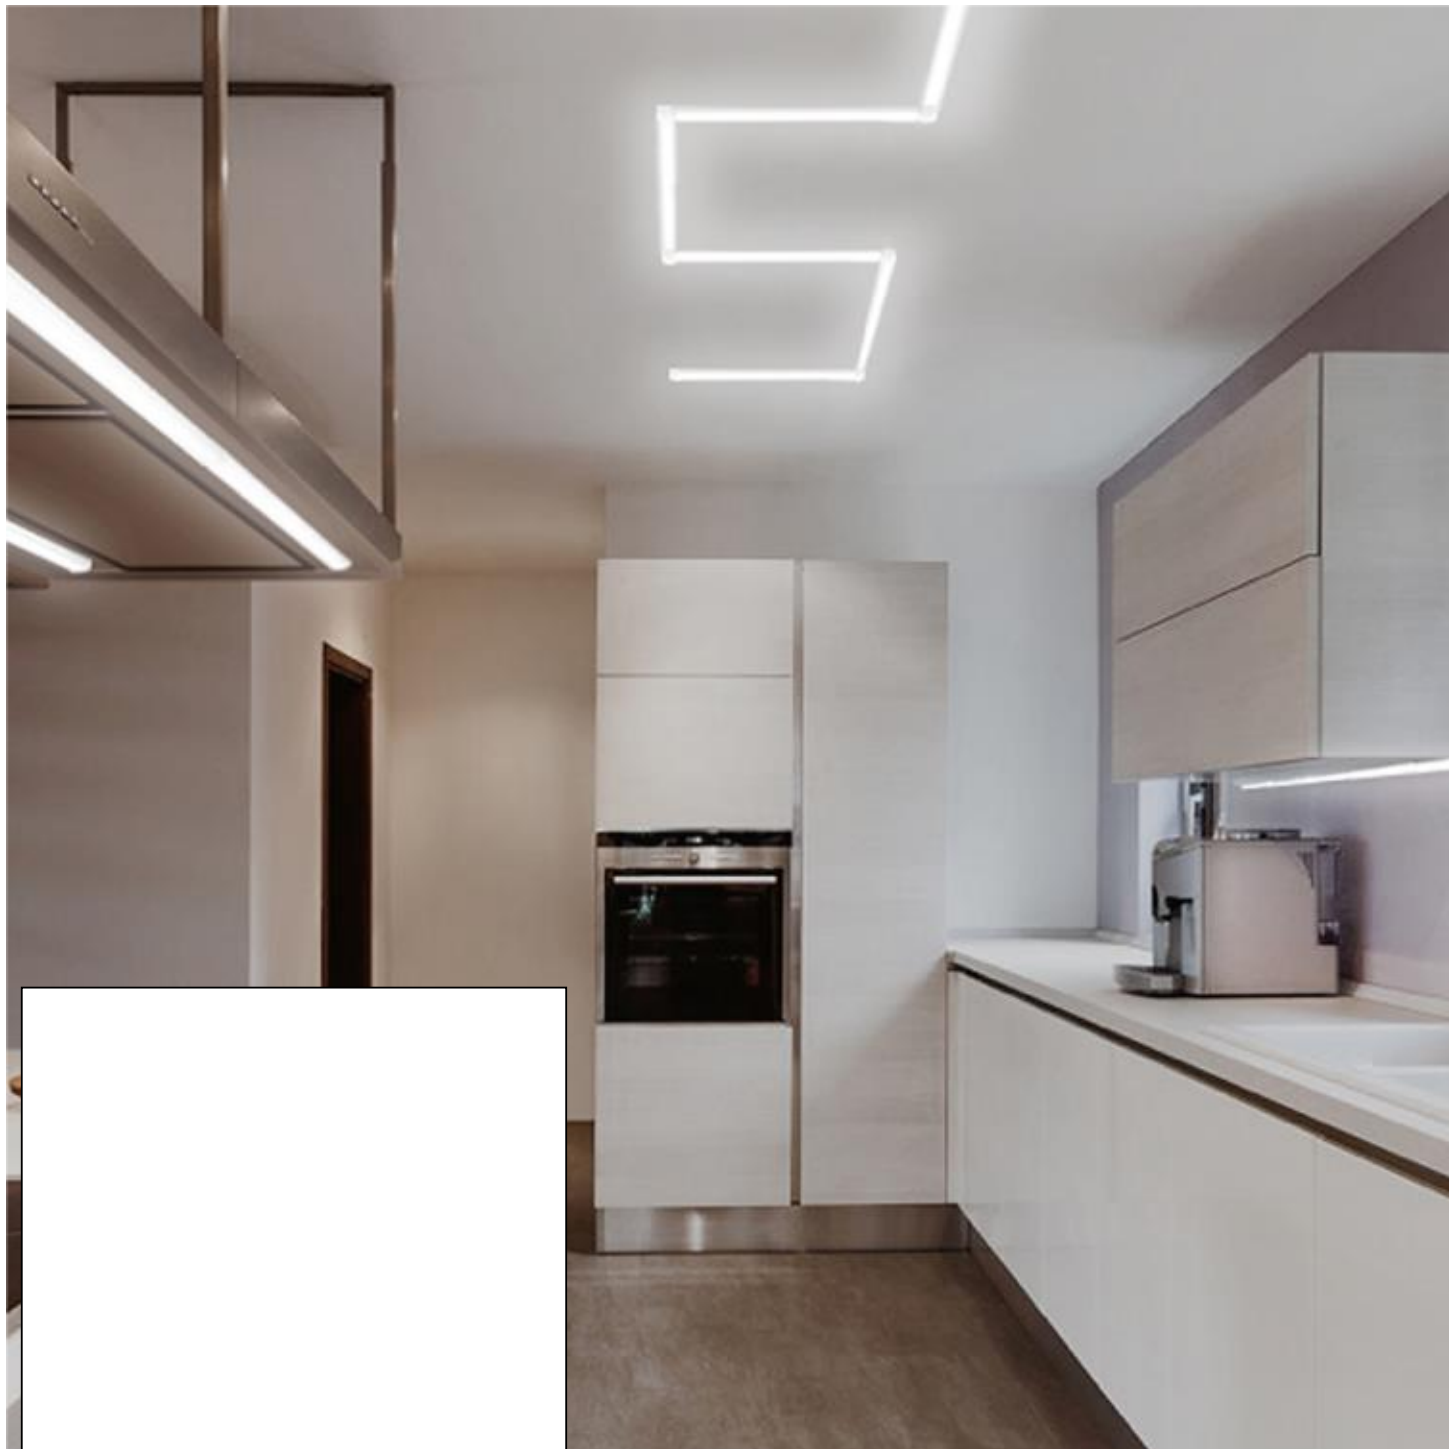

Manual:

https://shop.sigor.de/media/pdf/4010801_manual.pdf

as of: 08.02.2022

Page: 2

SIGOR Licht GmbH • Eichenhofer Weg 81 • 42279 Wuppertal
Telefon 0 23 39 - 12 61 - 0 • Telefax 0 23 39 - 12 61 61
info@sigor.de • www.sigor.de

Handelsregister HRB 19472
USt-IdNr.: DE 814574569
WEEE-Reg.-Nr.: DE 45242363

Geschäftsführer:
Michael Perterer
Robin Scheffel

