

**Datasheet**  
**4024301**

**Aufbauleuchte Circel 270mm weiss**




Honey, salt and discontinued light sources have one thing in common: they don't go bad. Often it's small changes to the design or lumen package, or even just a switch to a different production center, that causes a bulb, fixture, or the like to no longer be carried over into a new product line. But that doesn't make them bad. For foxes, who are on the thing after a good bargain, offers our Abverkaufsware neat fodder - and without risk, because our guarantee applies to this just as for current catalog goods!




Dimmable no

3.300 lm	luminous flux [lm]
29,00 Watt	rated power
4000 K	colour temperature
Ra>80	colour rendering
<5 sdc <sub>m</sub>	colour consistency
110°	beam angle
weiss	Colour housing
IP20	type of protection
-10° - 40°C	temperature range in operation
0.95	power factor
230 V AC	voltage
50/60 Hz	operating frequency
130 mA	current
29 kWh/100h	energy consumption
<1,0 s	warm-up time up to 60% of the full light output
<0,5 s	starting time
Ø 50.000 h	nominal life time
L70B50	rated life time L70/B50
0.7	lumen maintenance factor at the end of the nominal life

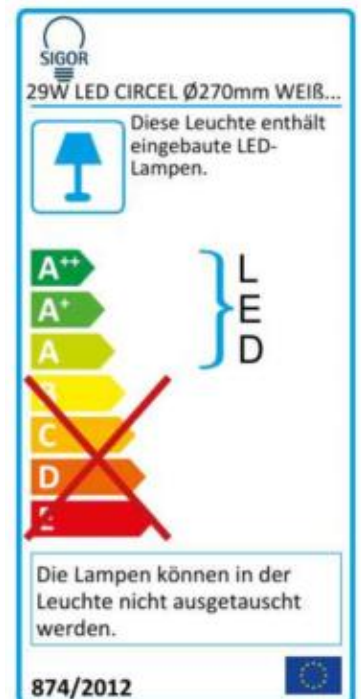

4024301

Aufbauleuchte Circel 270mm weiss

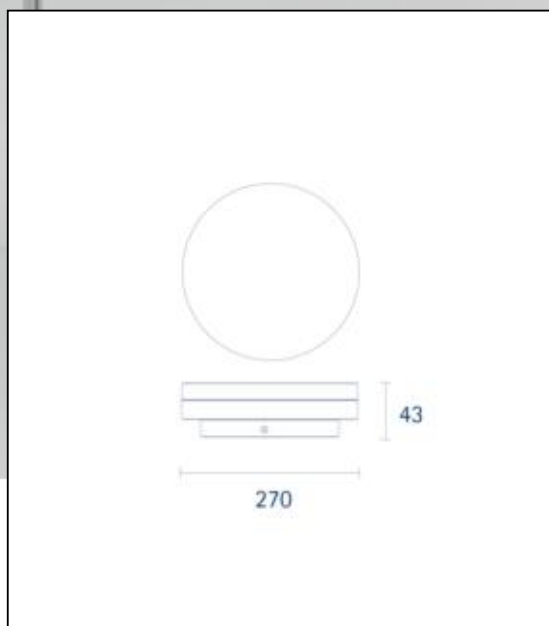

**Manual:**

[https://shop.sigor.de/media/pdf/4024301\\_manual.pdf](https://shop.sigor.de/media/pdf/4024301_manual.pdf)

as of: 05.12.2022

Page: 2

