

**Datasheet**  
**4025701**

**Aufbauleuchte Shine 300mm weiß Ra90 Dim**

Our 24W Shine 300mm has been designed in a timeless round design. It has a glare-free illumination, without the formation of shadows. For an indirect lighting component has been provided via the rear located translucent covers. Our ceiling light finds its field of application in the most different places. Due to its switchable luminous flux from 1.000lm to 1.800lm up to 2.300lm and the adjustable light color between 3000K and 4000K, it cannot be surpassed in individualization. In addition, our Shine can be additionally controlled with a triac dimmer in any setting constellation. Due to its quick mounting set, the mounting takes only a short time, so our Shine is also very well suited as a project light. Especially important in the object: we offer 5 years warranty on the function and vouch for the high quality workmanship and durability of this luminaire. If you would like to know with which dimmers this product is compatible, please follow the link to the test results from our own workshop.




Dimmable: yes

Recommended dimmer: [www.sigor.de/dimmerliste](http://www.sigor.de/dimmerliste)

2.300 lm	luminous flux [lm]
24,00 Watt	rated power
3000/4000 K	colour temperature
Ra>90	colour rendering
<5 sdcn	colour consistency
110°	beam angle
weiss	Colour housing
IP20	type of protection
-10° - 40°C	temperature range in operation
0.9	power factor
230 V AC	voltage
50/60 Hz	operating frequency
170 mA	current
24 kWh/1000h	energy consumption
<0,5 s	warm-up time up to 60% of the full light output
<0,5 s	starting time
Ø 50.000 h	nominal life time
L70B50	rated life time L70/B50
0.7	lumen maintenance factor at the end of the nominal life

Spectral power distribution  
in the range 180 - 800 nm

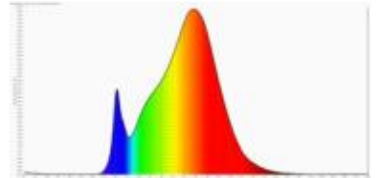

**SIGOR**  
4025701

A	
B	
C	
D	
E	
F	<b>F</b>
G	


**24**  
kWh/1000h

2019/2015



4025701

Aufbauleuchte Shine 300mm weiß Ra90 Dim

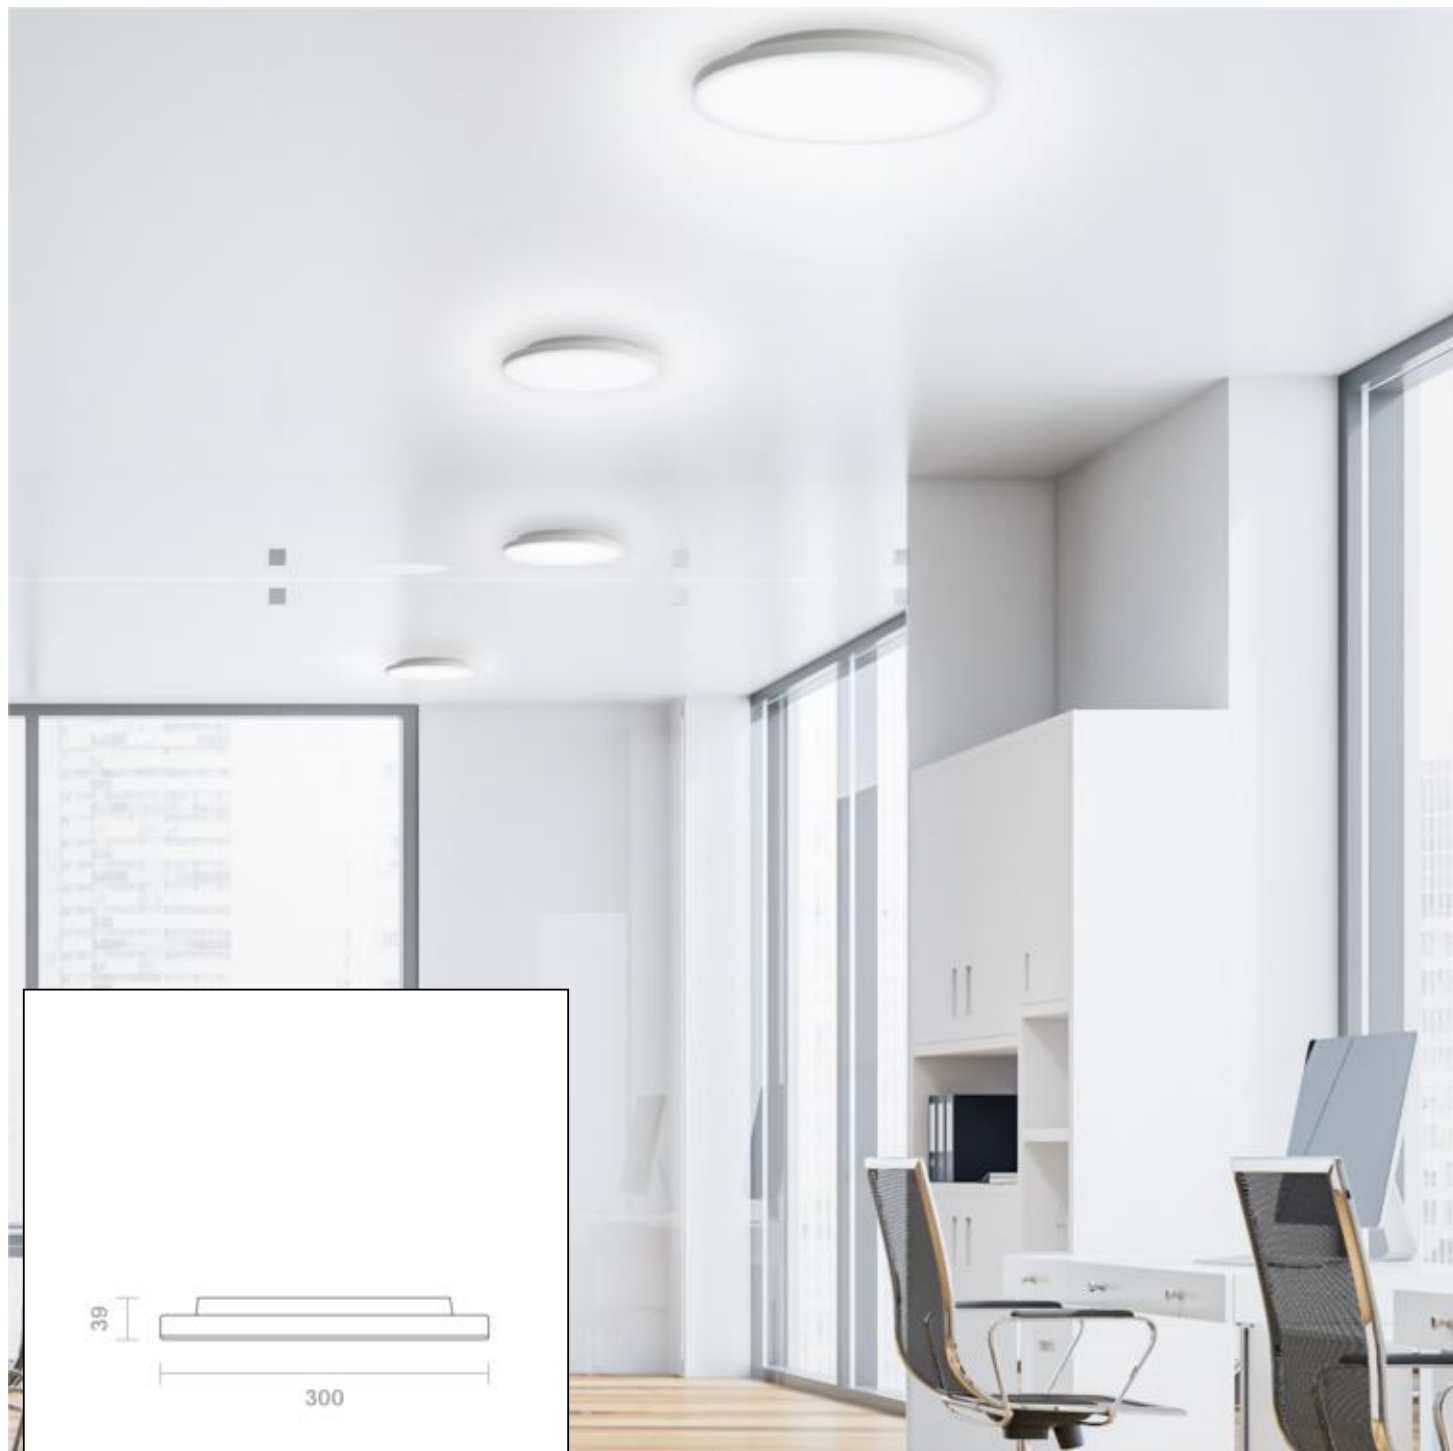

**Manual:**

[https://shop.sigor.de/media/pdf/4025701\\_manual.pdf](https://shop.sigor.de/media/pdf/4025701_manual.pdf)

as of: 05.12.2022

Page: 2