

Datasheet
4033101

Aufbauleuchte Square 210mm silber




Dimmable no

Our 15W **Square** has been designed in a timeless square design. It has a glare-free illumination without the formation of shadows, even the side covers radiate with. Our ceiling lamp finds its field of application in the most different places. Mainly you will use but due to the IP44 at the house or under the roof, such as a home entrance lighting. Due to its quick mounting kit, the mounting requires only a small amount of time, so our Square is also very well suited as a project light. Especially important in the object: we offer 5 years warranty on the function and vouch for the high quality workmanship and durability of this lamp.

| | |
|--------------|---|
| 1.600 lm | luminous flux [lm] |
| 15,00 Watt | rated power |
| 3000 K | colour temperature |
| Ra>80 | colour rendering |
| <5 sdcms | colour consistency |
| 110° | beam angle |
| silber | Colour housing |
| IP44 | type of protection |
| -10° - 40°C | temperature range in operation |
| 0.95 | power factor |
| 230 V AC | voltage |
| 50/60 Hz | operating frequency |
| 65 mA | current |
| 15 kWh/1000h | energy consumption |
| <0.5 s | warm-up time up to 60% of the full light output |
| <0.5 s | starting time |
| Ø 50.000 h | nominal life time |
| L80B10 | rated life time L70/B50 |
| 0.8 | lumen maintenance factor at the end of the nominal life |

Spectral power distribution
in the range 180 - 800 nm

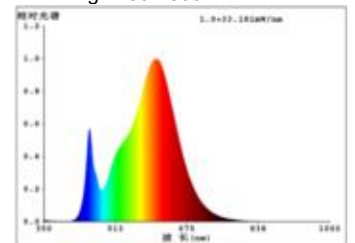

SIGOR
4033101

| | |
|---|----------|
| A | |
| B | |
| C | |
| D | |
| E | |
| F | F |
| G | |

15
kWh/1000h

2019/2015



4033101

Aufbauleuchte Square 210mm silber



Manual:

https://shop.sigor.de/media/pdf/4033101_manual.pdf

as of: 18.12.2023

Page: 2

