

Datasheet 4034101

Aufbauleuchte Square 260mm silber



Dimmable no

Our 29 W **Square** has been designed in a timeless square design. It has a glare-free illumination without the formation of shadows, even the side covers radiate with. Our ceiling lamp finds its field of application in the most different places. Mainly you will use but due to the IP44 at the house or under the roof, such as a home entrance lighting. Due to its quick mounting kit, the mounting requires only a small amount of time, so our Square is also very well suited as a project light. Especially important in the object: we offer 5 years warranty on the function and vouch for the high quality workmanship and durability of this lamp.


3.300 lm luminous flux [lm]
29,00 Watt rated power
3000 K colour temperature
Ra>80 colour rendering
<5 sdcn colour consistency
110° beam angle

silber Colour housing
IP20 type of protection
-10° - 40°C temperature range in operation

0.95 power factor
230 V AC voltage
50/60 Hz operating frequency
130 mA current
29 kWh/1000h energy consumption
<0.5 s warm-up time up to 60% of the full light output
<0.5 s starting time

Ø 50.000 h nominal life time
L80B10 rated life time L70/B50
0.8 lumen maintenance factor at the end of the nominal life

Spectral power distribution
in the range 180 - 800 nm



ENERGY

SIGOR
4034101

A

B

C

D

E

F

G



29
kWh/1000h

2019/2015



4034101

Aufbauleuchte Square 260mm silber

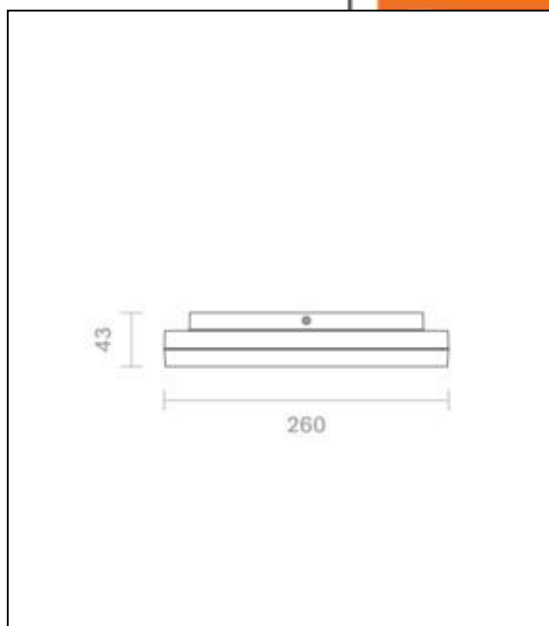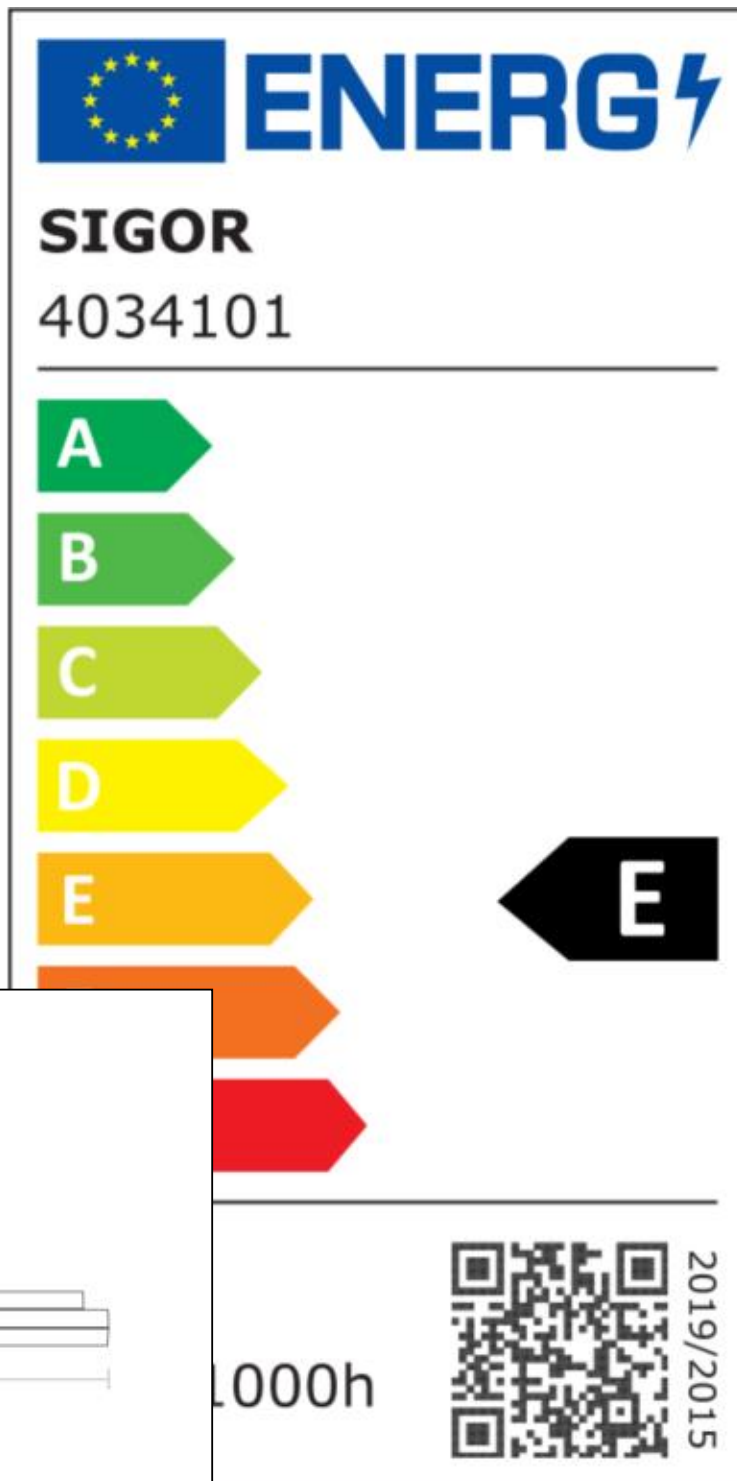

Manual:

https://shop.sigor.de/media/pdf/4034101_manual.pdf

as of: 18.12.2023

Page: 2