


## **Datasheet** 4034301

## Aufbauleuchte Square 260mm silber





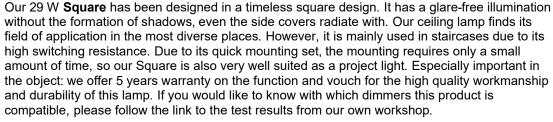



Recommended dimmer: www.sigor.de/dimmerliste

3.300 lm luminous flux [lm] 29,00 Watt rated power

3000 K colour temperature Ra>80 colour rendering <5 sdcm colour consistency 110° beam angle

silber Colour housing **IP20** type of protection

-10° - 40°C temperature range in operation

0.95 power factor 230 V AC voltage

50/60 Hz operating frequency

130 mA current

29 kWh/1000h energy consumption

warm-up time up to 60% of the full light output <0.5 s

starting time <0.5 s


Ø 50.000 h nominal life time L80B10 rated life time L70/B50

lumen maintenance factor at the end of the 8.0

USt-IdNr.:


nominal life

Spectral power distribution in the range 180 - 800 nm







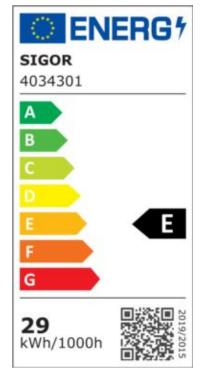

Geschäftsführer:

Michael Perterer

Robin Scheffel

DE 814574569

WEEE-Reg.-Nr.: DE 45242363

as of: 18.12.2023

Page: 1



## Aufbauleuchte Square 260mm silber 4034301





as of: 18.12.2023

Page: 2

**SIGOR Licht GmbH** • Eichenhofer Weg 81 • 42279 Wuppertal Handelsregister HRB 19472 Telefon 0 23 39 - 12 61 - 0 • Telefax 0 23 39 - 12 61 61

info@sigor.de • www.sigor.de

USt-IdNr.:

DE 814574569 WEEE-Reg.-Nr.: DE 45242363

Geschäftsführer: Michael Perterer Robin Scheffel

