

Datasheet 4036001

Aufbauleuchte Plank 900mm silber Dim


Our 900mm **Plank** has been designed in a timeless rectangular design. It has a glare-free illumination without any shadowing, even the side covers shine with it. If you want a flexible lighting design, our Plank will help you. ES, the light colour can be changed from 3,000K to 4,000K and the lumen package from 2,700lm to 3,500lm via DIP switch. Furthermore, it can be operated with a dimmer. Our ceiling luminaire is used in a wide variety of places. However, due to the IP54 rating, it is mainly used at the house or under the roof, for example as house entrance lighting. With our optional accessories, our Plank can be transformed into a pendant luminaire in no time at all. Thanks to its 2-part mounting system, fixing takes only a short time, making our Plank also very suitable as a project luminaire. Particularly important for projects: we offer a 5-year guarantee on the function and vouch for the high-quality workmanship and durability of this luminaire.



Dimmable: yes

Recommended dimmer: www.sigor.de/dimmerliste

3.500 lm	luminous flux [lm]
32,00 Watt	rated power
3000-4000 K	colour temperature
Ra>80	colour rendering
5 sdcm	colour consistency
120°	beam angle
silber	Colour housing
IP54	type of protection
-10° - 40°C	temperature range in operation
0.95	power factor
230 V AC	voltage
50/60 Hz	operating frequency
110/140 mA	current
32 kWh/1000h	energy consumption
<1,0 s	warm-up time up to 60% of the full light output
<0.5 s	starting time
Ø 50.000 h	nominal life time
L80B10	rated life time L70/B50
0.8	lumen maintenance factor at the end of the nominal life

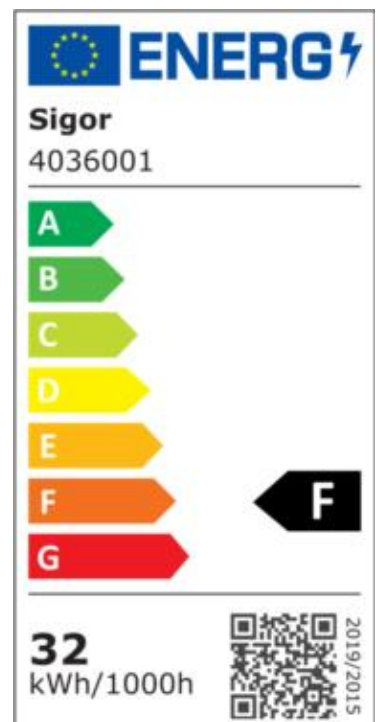

4036001

Aufbauleuchte Plank 900mm silber Dim



Manual:

https://shop.sigor.de/media/pdf/4036001_manual.pdf

as of: 18.12.2023

Page: 2