


## Datasheet 4036101

### Aufbauleuchte Plank 1200mm silber Dim

Our 1,200 mm **Plank** has been designed in a timeless rectangular design. It has a glare-free illumination without any shadowing, even the side covers shine with it. If you want a flexible lighting design, our Plank will help you. ES, the light colour can be changed from 3,000 K to 4,000 K and the lumen package from 3,200 lm to 4,200 lm via DIP switch. Furthermore, it can be operated with a dimmer. Our ceiling luminaire can be used in a wide variety of places. However, due to the IP54 rating, it is mainly used at the house or under the roof, for example as house entrance lighting. With our optional accessories, our Plank can be transformed into a pendant luminaire in no time at all. Thus, the places of application are extremely versatile. Thanks to its 2-part mounting system, fixing takes only a short time, making our Plank also very suitable as a project luminaire. Particularly important in the object: we offer a 5-year guarantee on the function and vouch for the high-quality workmanship and durability of this luminaire.



Dimmable: yes


Recommended dimmer: [www.sigor.de/dimmerliste](http://www.sigor.de/dimmerliste)

4.200 lm	luminous flux [lm]
38,00 Watt	rated power
3000-4000 K	colour temperature
Ra>80	colour rendering
5 sdcm	colour consistency
120°	beam angle

silber	Colour housing
IP54	type of protection
-10° - 40°C	temperature range in operation

0.95	power factor
230 V AC	voltage
50/60 Hz	operating frequency
130/170 mA	current
38 kWh/1000h	energy consumption
<1,0 s	warm-up time up to 60% of the full light output
<0.5 s	starting time

Ø 50.000 h	nominal life time
L80B10	rated life time L70/B50
0.7	lumen maintenance factor at the end of the nominal life

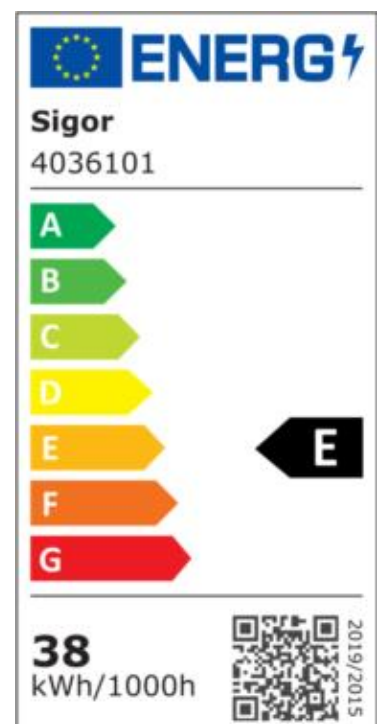

4036101

Aufbauleuchte Plank 1200mm silber Dim



**Manual:**

[https://shop.sigor.de/media/pdf/4036101\\_manual.pdf](https://shop.sigor.de/media/pdf/4036101_manual.pdf)

as of: 22.09.2023

Page: 2