

**Datasheet**  
**4040401**

**Panel Einbau Fled 620x620mm weiß UGR<19**


Our 36 W **FLED PANEL** recessed panel finds its application in the installation in cassette ceilings. It is suitable for schools, sports facilities and offices. Especially important in the object: we offer 3-year warranty and vouch for the high-quality workmanship and durability. The panel is equipped with the latest generation LED technology. This has increased the efficiency to 100 lm per watt. Power is supplied via an external driver which is included in the delivery program.



Dimmable no

3.600 lm	luminous flux [lm]
36,00 Watt	rated power
4000 K	colour temperature
Ra>80	colour rendering
<5 sdc <sub>m</sub>	colour consistency
90°	beam angle
weiss	Colour housing
IP20	type of protection
-45° - 65°C	temperature range in operation
0.9	power factor
230 V AC	voltage
50/60 Hz	operating frequency
mA	current
36 kWh/1000h	energy consumption
<1.0 s	warm-up time up to 60% of the full light output
<0.5 s	starting time
Ø 30.000 h	nominal life time
L70B50	rated life time L70/B50
0.7	lumen maintenance factor at the end of the nominal life

Spectral power distribution  
in the range 180 - 800 nm



**SIGOR**  
4040401

A	
B	
C	
D	
E	←
F	
G	



**36**  
kWh/1000h

2019/2015



4040401

Panel Einbau Fled 620x620mm weiß UGR<19

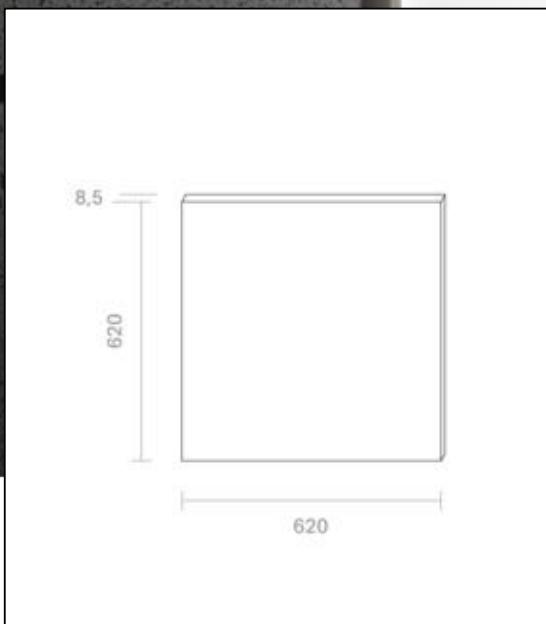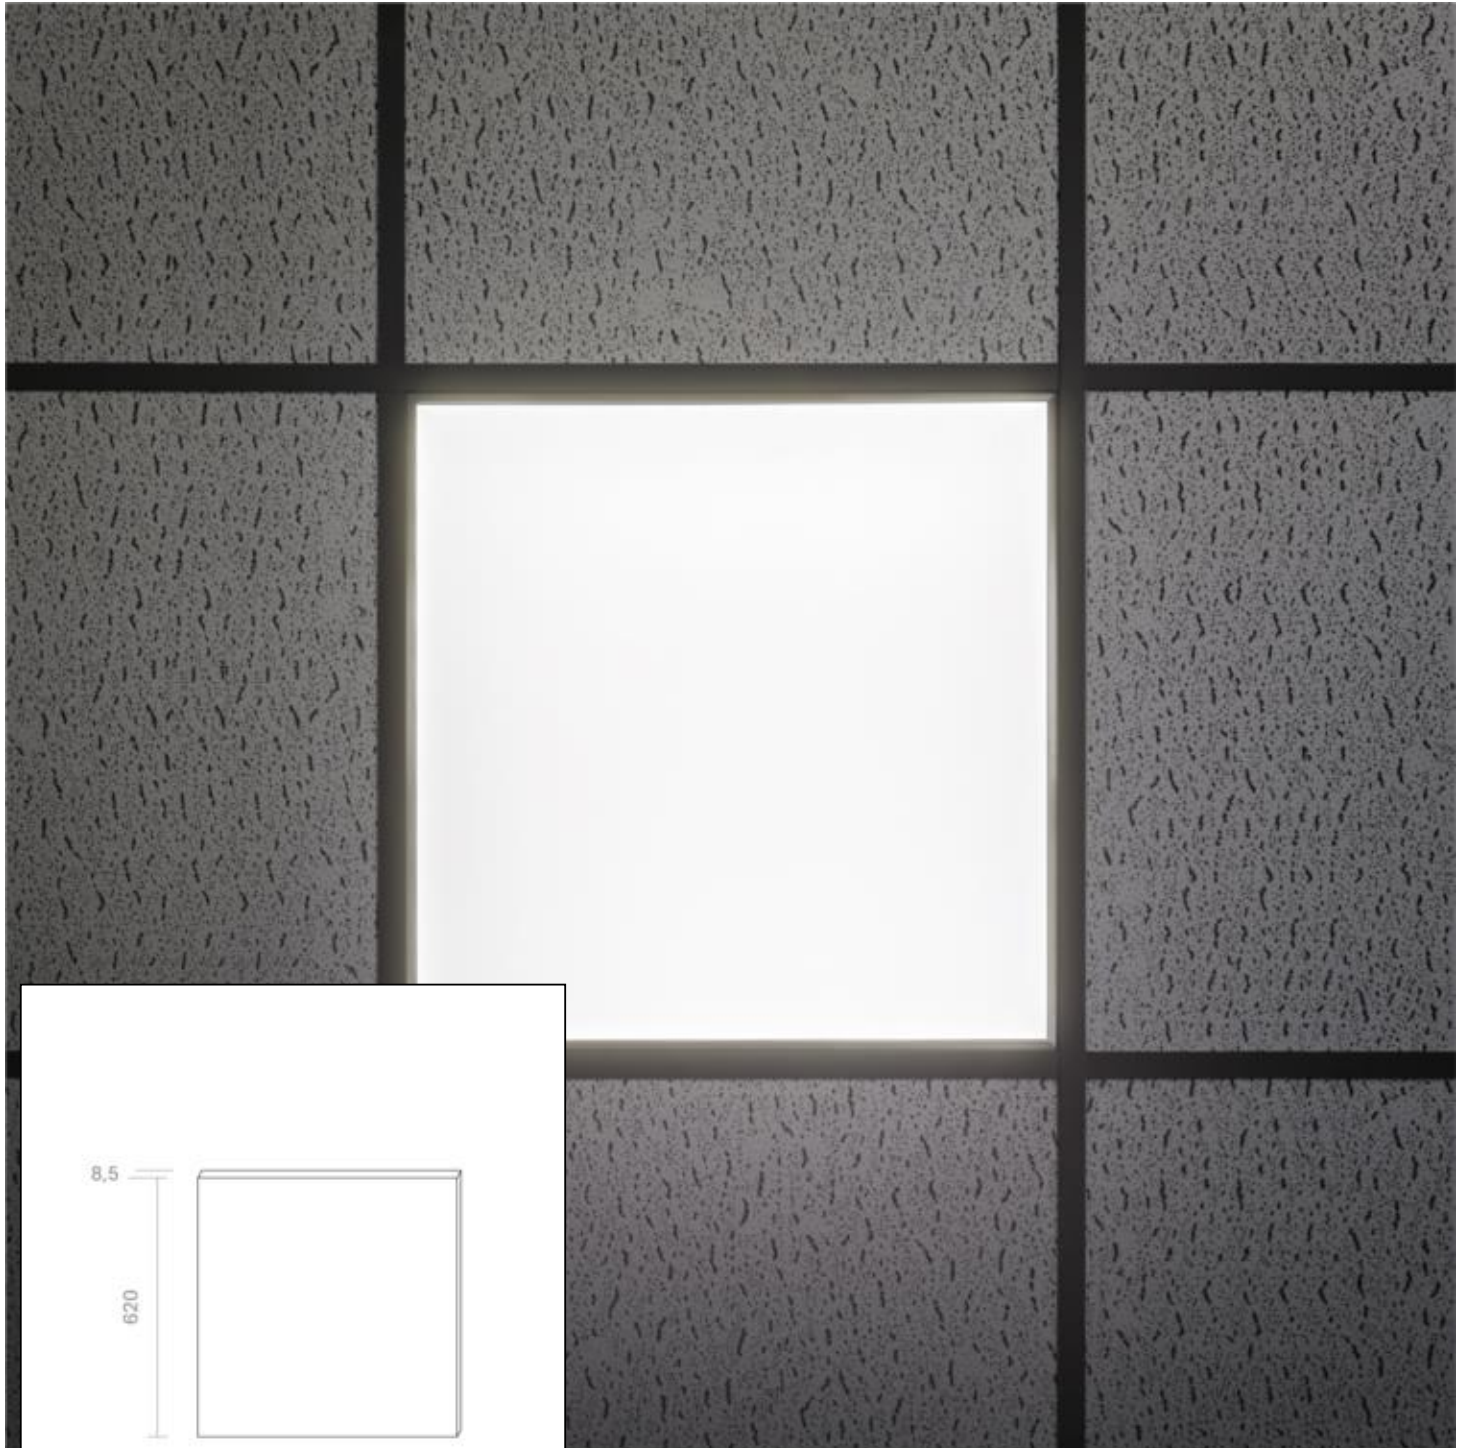

as of: 27.11.2024

Page: 2

**Sigor Licht GmbH** • Eichenhofer Weg 81 • 42279 Wuppertal  
Telefon 0 23 39 - 12 61 - 0 • Telefax 0 23 39 - 12 61 61  
info@sigor.de • www.sigor.de

Handelsregister HRB 19472  
USt-IdNr.: DE 814574569  
WEEE-Reg.-Nr.: DE 45242363

Geschäftsführer:  
Michael Perterer  
Robin Scheffel

