

Datasheet
4040701

Panel Aufbau Fled 620x620mm weiß UGR<22


Our 36 W **FLED PANEL** surface-mount panel has a pre-installed frame and features a quick-mount system. With only 28mm installation height and the Frame integrated driver, it corresponds to the appearance of an insert panel. It is suitable for schools, sports facilities and offices. Especially important in the object: we offer 3-year warranty and vouch for the high-quality workmanship and durability. The panel is equipped with the latest generation LED technology. This has increased the efficiency to 100 lm per watt. Power is supplied via an external driver which is included in the delivery program.



Dimmable no

3.600 lm	luminous flux [lm]
36,00 Watt	rated power
3000 K	colour temperature
Ra>80	colour rendering
<5 sdcM	colour consistency
115°	beam angle
weiss	Colour housing
IP20	type of protection
-45° - 65°C	temperature range in operation
0.9	power factor
230 V AC	voltage
50/60 Hz	operating frequency
mA	current
36 kWh/1000h	energy consumption
<1.0 s	warm-up time up to 60% of the full light output
<0.5 s	starting time
Ø 25.000 h	nominal life time
L70B10	rated life time L70/B50
0.7	lumen maintenance factor at the end of the nominal life

Spectral power distribution
in the range 180 - 800 nm



SIGOR
4040701

A	
B	
C	
D	
E	
F	F
G	


36
kWh/1000h

2019/2015



4040701

Panel Aufbau Fled 620x620mm weiß UGR<22

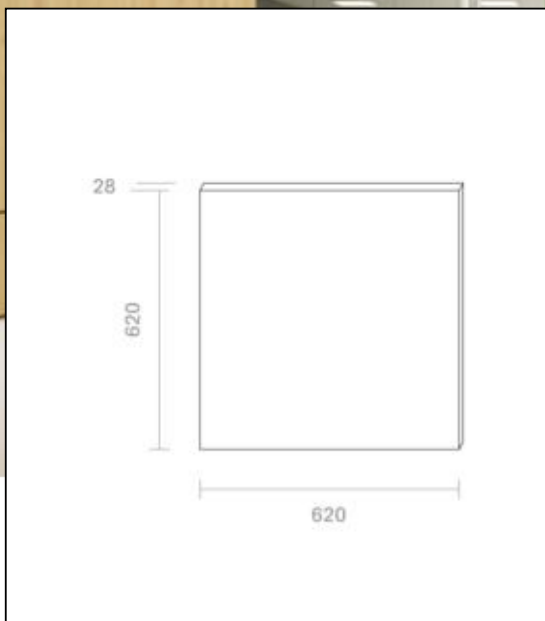

as of: 15.07.2024

Page: 2

Sigor Licht GmbH • Eichenhofer Weg 81 • 42279 Wuppertal
Telefon 0 23 39 - 12 61 - 0 • Telefax 0 23 39 - 12 61 61
info@sigor.de • www.sigor.de

Handelsregister HRB 19472
USt-IdNr.: DE 814574569
WEEE-Reg.-Nr.: DE 45242363

Geschäftsführer:
Michael Perterer
Robin Scheffel

