

Datasheet

4044201

Backlit Panel Einbau Fled 620x620mm weiß UGR<19

For the standard-compliant lighting of offices with VDU workstations according to DIN EN 12464-1. Highly efficient with up to 120 lm/W. Environmentally friendly packaging. Individual driver selection



Dimmable: yes

Recommended dimmer: www.sigor.de/dimmerliste


4.400 lm luminous flux [lm]
36,00 Watt rated power
4000 K colour temperature
Ra>80 colour rendering
<5 sdcn colour consistency
90° beam angle

weiß Colour housing
IP40 type of protection
-45° - 65°C temperature range in operation

0.9 power factor
40 V AC voltage
50/60 Hz operating frequency
900 mA current
36 kWh/1000h energy consumption
<1.0 s warm-up time up to 60% of the full light output
<0.5 s starting time

Ø 50.000 h nominal life time
L80B10 rated life time L70/B50
0.7 lumen maintenance factor at the end of the nominal life

Spectral power distribution
in the range 180 - 800 nm



Sigor
4044201

| | |
|---|---|
| A | |
| B | |
| C | |
| D | |
| E | ← |
| F | |
| G | |


36
kWh/1000h

2019/2015



4044201

Backlit Panel Einbau Fled 620x620mm weiß UGR<19

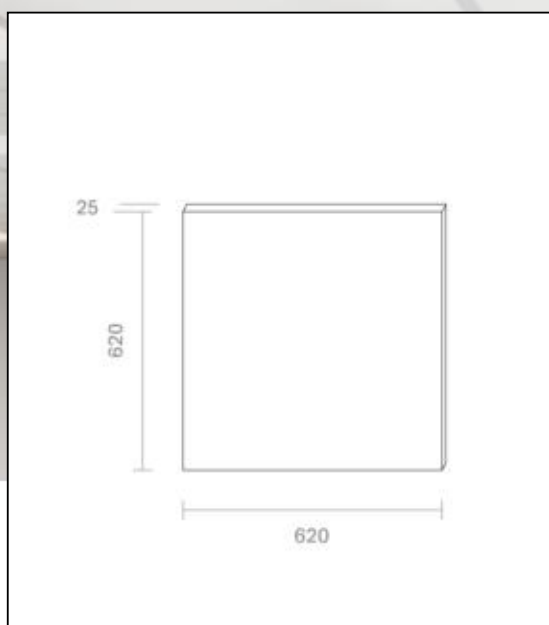

as of: 23.04.2024

Page: 2

Sigor Licht GmbH • Eichenhofer Weg 81 • 42279 Wuppertal
Telefon 0 23 39 - 12 61 - 0 • Telefax 0 23 39 - 12 61 61
info@sigor.de • www.sigor.de

Handelsregister HRB 19472
USt-IdNr.: DE 814574569
WEEE-Reg.-Nr.: DE 45242363

Geschäftsführer:
Michael Perterer
Robin Scheffel

