

Datasheet
4519601

Akku-Tischleuchte Nutalis mini feuerrot

Additional information:

Material/Surface : Aluminum powder coated for outdoor use.

Charging time = 4 - 5 h

Lighting time = up to 9 h at 100% power

Battery = Li-Ion with 3,000 mAh capacity

Control = touch switch, dimmable

Weight = 385 g

Scope of delivery = light incl. 1.2 meter magnetic charging cable and power adapter

Charging is done with easy-connect system at the base of the light.



Dimmable: yes

Recommended dimmer: www.sigor.de/dimmerliste


130 lm	luminous flux [lm]
2,20 Watt	rated power
2200/2700 K	colour temperature
Ra>85	colour rendering
<5 sdc	colour consistency
°	beam angle

feuerrot	Colour housing
IP54	type of protection
-20° - 40°C	temperature range in operation

3,7 V AC	power factor
Hz	voltage
1 mA	operating frequency
3 kWh/1000h	current
<1,0 s	energy consumption
<0.5 s	warm-up time up to 60% of the full light output
	starting time



Ø 25.000 h	nominal life time
L70B50	rated life time L70/B50
0.7	lumen maintenance factor at the end of the nominal life

Spectral power distribution
in the range 180 - 800 nm



4519601

Akku-Tischleuchte Nutalis mini feuerrot

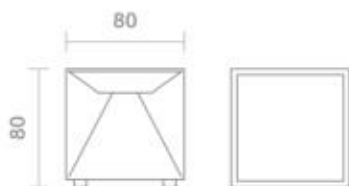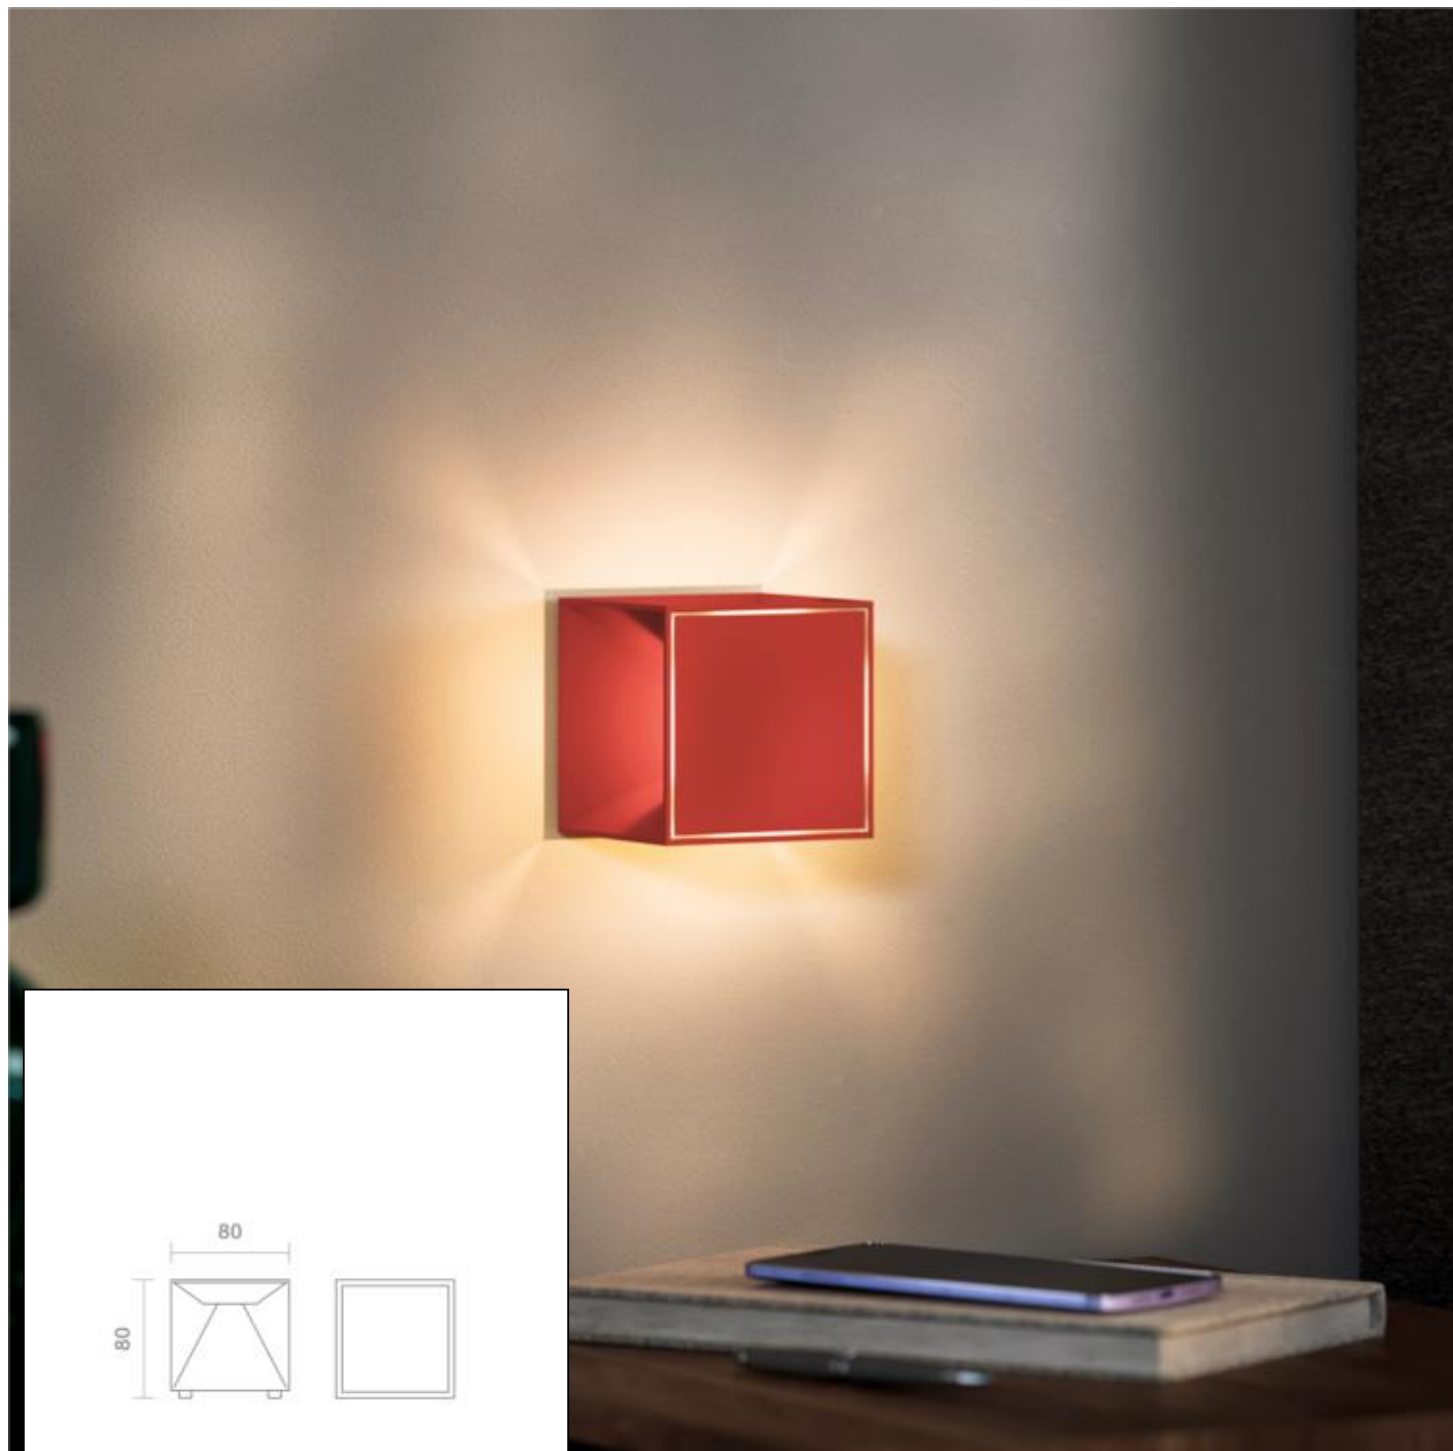

as of: 08.05.2024

Page: 2

Sigor Licht GmbH • Eichenhofer Weg 81 • 42279 Wuppertal
Telefon 0 23 39 - 12 61 - 0 • Telefax 0 23 39 - 12 61 61
info@sigor.de • www.sigor.de

Handelsregister HRB 19472
USt-IdNr.: DE 814574569
WEEE-Reg.-Nr.: DE 45242363

Geschäftsführer:
Michael Perterer
Robin Scheffel

