

Datasheet 5727801

Einbauleuchte 68 Diled Low Glare 6W 380lm 2700K



Our 6W **Downlights 68 Diled Low Glare** are characterized by a compact design with an ultraflat installation depth of 49mm and direct connection to 230 V. Visually, they are almost indistinguishable from a halogen lamp. Thanks to the radiation via the reflector, the light is completely glare-free.

The recessed downlight has a brilliant light color of 2,700K and lets everything shine in a beautiful light. In a white die-cast housing, our Diled sets its accents. The recessed luminaire is equipped with the latest LED technology and is therefore highly dimmer-compatible. Power is supplied via an integrated driver.



Dimmable yes

Recommended dimmer: www.sigor.de/dimmerliste

350 lm luminous flux [lm] 6,00 Watt rated power

2700 K colour temperature Ra>95 colour rendering <5 sdcm colour consistency

32° beam angle

weiß Colour housing IP20 type of protection

-20° - 40°C temperature range in operation

0.9 power factor 230 V AC voltage

50/60 Hz operating frequency

28 mA current

6 kWh/1000h energy consumption

<1.0 s warm-up time up to 60% of the full light output

<0.5 s starting time

 \varnothing 40.000 h nominal life time L70B50 rated life time L70/B50

0.7 lumen maintenance factor at the end of the

Handelsregister HRB 19472

WEEE-Reg.-Nr.: DE 45242363


DE 814574569


Robin Scheffel

USt-IdNr.:

nominal life

Spectral power distribution in the range 180 - 800 nm



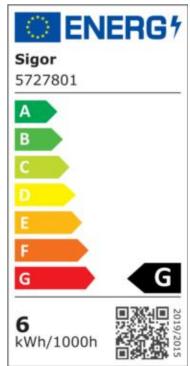



as of: 28.03.2024