

## **Datasheet** 5731501

## 7,5W Diled GU10 520lm 2700K-2100K 36° dtw



Our 7.5W Diled GU10 is the successor of the successful Haled series from Sigor. The unique reflector perfectly imitates that of a halogen version. The high colour rendering index guarantees a colour rendering that is almost similar to daylight. The recessed downlight has Dim-To-Warm technology. It is characterised by the reduction of the light colour when dimmed from 2,700K to 2,100K, as with a traditional incandescent lamp. The GU10 is equipped with the latest LED technology and therefore has a high dimmer compatibility. Particularly important in the property: we offer a 3-year guarantee and vouch for the high-quality workmanship and durability.



Recommended dimmer: www.sigor.de/dimmerliste

520 lm luminous flux [lm] 7,50 Watt rated power

60 Watt equivalent incandescent lighting

2700-2100 K colour temperature Ra>95 colour rendering <5 sdcm colour consistency 36° beam angle

**GU10** base PAR16 outer bulb type of glass

100 mm length

50 mm diameter IP20

type of protection

temperature range in operation -10° - 30°C

power factor

230 V AC voltage

50/60 Hz operating frequency

20 mA current

8 kWh/1000h energy consumption

warm-up time up to 60% of the full light output <1,0 s


<0.5 s starting time


Ø 40.000 h nominal life time L70B50 rated life time L70/B50

lumen maintenance factor at the end of the 0.7

nominal life

Spectral power distribution in the range 180 - 800 nm



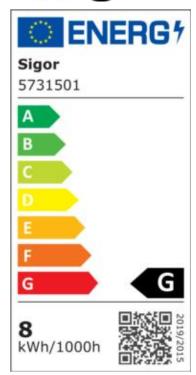

as of: 27.06.2023