

## Datasheet 5752401

### 4W Luxar Glas GU10 230lm 3000K 36° dim




Dimmable: yes

Our 4W **LUXAR GLAS PAR16** is optimally suited for object and design lights due to the high quality finish. It is equipped with the latest LED technology and thus has a high dimmer compatibility. Its color rendering with an RA value of 90 makes everything shine true to color. The many variants of the module in light color and beam angles allow a wide coverage of different fields of application. The low power consumption of the LED is confirmed by the good energy efficiency class.

Recommended dimmer: [www.sigor.de/dimmerliste](http://www.sigor.de/dimmerliste)

230 lm	luminous flux [lm]
4,00 Watt	rated power
35 Watt	equivalent incandescent lighting
3000 K	colour temperature
Ra>90	colour rendering
<6 sdcn	colour consistency
36°	beam angle
GU10	base
QPAR51	outer bulb
klar	type of glass
54 mm	length
50 mm	diameter
IP20	type of protection
-20° - 40°C	temperature range in operation
0.5	power factor
220-240 V AC	voltage
50/60 Hz	operating frequency
25 mA	current
4 kWh/1000h	energy consumption
<1.0 s	warm-up time up to 60% of the full light output
<0.5 s	starting time
Ø 25.000 h	nominal life time
L70B50	rated life time L70/B50
0.7	lumen maintenance factor at the end of the nominal life

Spectral power distribution  
in the range 180 - 800 nm

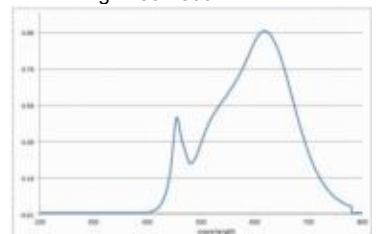

**ENERGY**

**SIGOR**  
5752401

A
B
C
D
E
F
G

**4**  
kWh/1000h

2019/2015

as of: 05.09.2023

