

**Datasheet**  
**5784501**

**4,5W GX53 Luxar GX53 470lm 2700K**

Our 4.5W **Luxar Micro GX53** is our LED replacement bulb to the Micro-Lynx. It is equipped with the latest LED technology. By removing the dimming function could be dispensed with not desired functionality and thus offered even more attractive price.


The low power consumption of the LED is confirmed by the good energy efficiency class. The illuminant has an opalized glass for shadow-free illumination. The lumen package of our Luxar can be compared to a 10W CFL Micro-Lynx.



Dimmable no

470 lm	luminous flux [lm]
4,50 Watt	rated power
40 Watt	equivalent incandescent lighting
2700 K	colour temperature
Ra>80	colour rendering
<6 sdcms	colour consistency
110°	beam angle
GX53	base
GX53	outer bulb
matt	type of glass
25 mm	length
75 mm	diameter
IP20	type of protection
-20° - 40°C	temperature range in operation
0.4	power factor
230 V AC	voltage
50/60 Hz	operating frequency
33 mA	current
5 kWh/1000h	energy consumption
<1,0 s	warm-up time up to 60% of the full light output
<0,5 s	starting time
Ø 15.000 h	nominal life time
L70B50	rated life time L70/B50
0.7	lumen maintenance factor at the end of the nominal life

Spectral power distribution  
in the range 180 - 800 nm

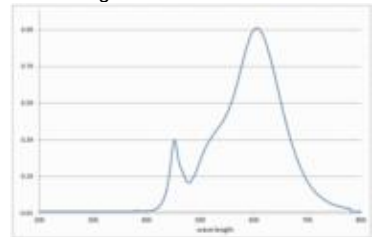

**SIGOR**  
5784501

A	
B	
C	
D	
E	
F	← F
G	

**5**  
kWh/1000h

2019/2015

as of: 24.11.2022

