

Datasheet
5784601

4,5W LED LUXAR GX53 4000K


Our 4.5W Luxar Micro GX53 is our LED replacement bulb to the Micro-Lynx. It is equipped with the most advanced LED technology. The low power consumption of the LED is confirmed by the good energy efficiency class. The bulb has an opalized glass for a shadow-free illumination.



Dimmable no

470 lm	luminous flux [lm]
4,50 Watt	rated power
40 Watt	equivalent incandescent lighting
4000 K	colour temperature
Ra>80	colour rendering
<6 sdcms	colour consistency
110°	beam angle
GX53	base
GX53	outer bulb
MATT	type of glass
25 mm	length
75 mm	diameter
IP20	type of protection
-20° - 40°C	temperature range in operation
0.4	power factor
230 V AC	voltage
50 Hz	operating frequency
33 mA	current
5 kWh/1000h	energy consumption
<1,0 s	warm-up time up to 60% of the full light output
<0,5 s	starting time
Ø 15 h	nominal life time
L70B50	rated life time L70/B50
0.9	lumen maintenance factor at the end of the nominal life

Spectral power distribution
in the range 180 - 800 nm

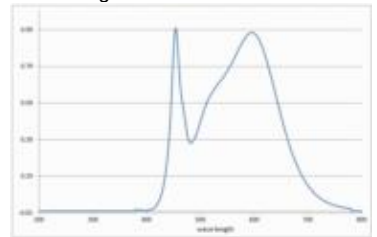

SIGOR
5784601

A
B
C
D
E
F
G

5
kWh/1000h
2019/2015

as of: 24.11.2022

