

Datasheet
5923201

7,2W/m HE PRO LED-Streifen 4000K 5m

Our 7.2W **PRO High Efficiency STRIP IP20** is all about environmental protection. Compared with our conventional LED strips, the HE strip is 30% more efficient. It has a remarkable efficiency of 201 lm/W. By using smaller power supplies, a very environmentally friendly lighting solution can be created.




A tight binning with only 3 SDCM guarantees a homogeneous light color both on the strip and different strips of this type.



Dimmable yes

7.465 lm	luminous flux
1.493 lm/m	luminous flux / m
36 Watt	rated power
7.20 Watt/m	rated power / m
24 V DC	output voltage
4000 K	colour temperature
Neutralweiss	colour perception
Ra>90	colour rendering
<3 sdc	colour consistency
120°	beam angle
5.000 mm	length of strip on wheel
5.000 mm	max. strip length
10 mm	width
1.50 mm	height
2835	LED chipset
108 LED/m	LED chips / m
9.26 mm	LED pitch
83.33 mm	smallest cuttable unit
1000 mm	length connection cable side 1
1000 mm	length connection cable side 2
50 mm	lowest bending radius
IP20	type of protection
80 °C	max. temperature at tc test point
-40° - 70°C	temperature range in operation
no	Aluminum profile necessary for cooling?
Ø 54.000 h	nominal life time
L80B10	rated life time
0.8	lumen maintenance factor at the end of the nominal life
300 mA	nominal current
36 kWh/1000h	energy consumption

Spectral power distribution
in the range 180 - 800 nm



Sigor
5923201

A	
B	← B
C	
D	
E	
F	
G	

36
kWh/1000h


2019/2015

as of: 05.12.2023



5923201

7,2W/m HE PRO LED-Streifen 4000K 5m

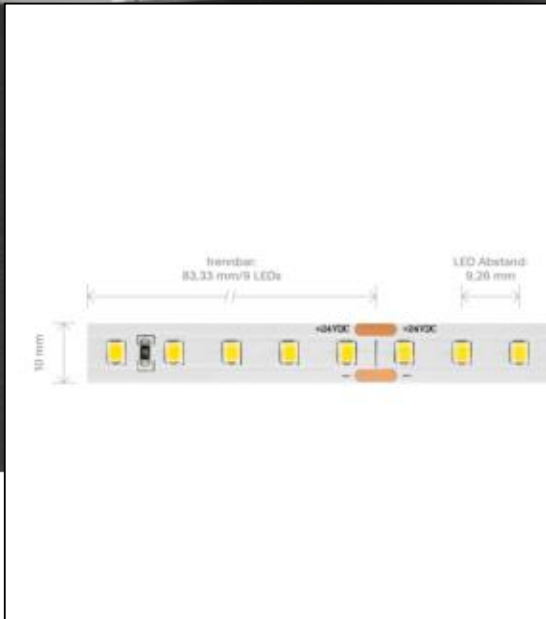

Manual:

https://shop.sigor.de/media/pdf/5923201_manual.pdf

as of: 05.12.2023

Page: 2

