

**Datasheet**  
**5933501**

**4,8W/m PRO LED-Streifen 2400K 5m**

Our 4.8 W **PRO STRIP IP20** belongs to the most frequently used strip group in the upscale lighting object. Here you have access to a wide range of luminous intensities and light colors from 2,400 K to 4,000 K.



A tight binning with only 3 SDCM guarantees a homogeneous light color both on the strip and with different strips of this type.


Particularly important in the object: we offer a 5-year warranty and vouch for the high-quality workmanship and durability of these strips.



Dimmable yes

3.600 lm	luminous flux
720 lm/m	luminous flux / m
24 Watt	rated power
4.80 Watt/m	rated power / m
24 V DC	output voltage
2400 K	colour temperature
Warmweiss-E)	colour perception
Ra>90	colour rendering
<3 sdcM	colour consistency
120°	beam angle
5.000 mm	length of strip on wheel
6.000 mm	max. strip length
8 mm	width
1.65 mm	height
2835	LED chipset
64 LED/m	LED chips / m
15.62 mm	LED pitch
125 mm	smallest cuttable unit
1000 mm	length connection cable side 1
1000 mm	length connection cable side 2
25 mm	lowest bending radius
IP20	type of protection
80 °C	max. temperature at tc test point
-40° - 85°C	temperature range in operation
no	Aluminum profile necessary for cooling?
Ø 54.000 h	nominal life time
L70B50	rated life time
0.7	lumen maintenance factor at the end of the nominal life
1	power factor
200 mA	nominal current
24 kWh/1000h	energy consumption

Spectral power distribution  
in the range 180 - 800 nm

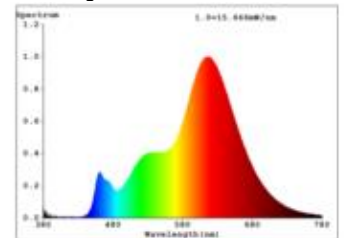

**ENERGY**

**SIGOR**  
5933501

A

B

C

D

E

F

G

**D**

**24**  
kWh/1000h


2019/2015

as of: 05.12.2023



5933501

4,8W/m PRO LED-Streifen 2400K 5m

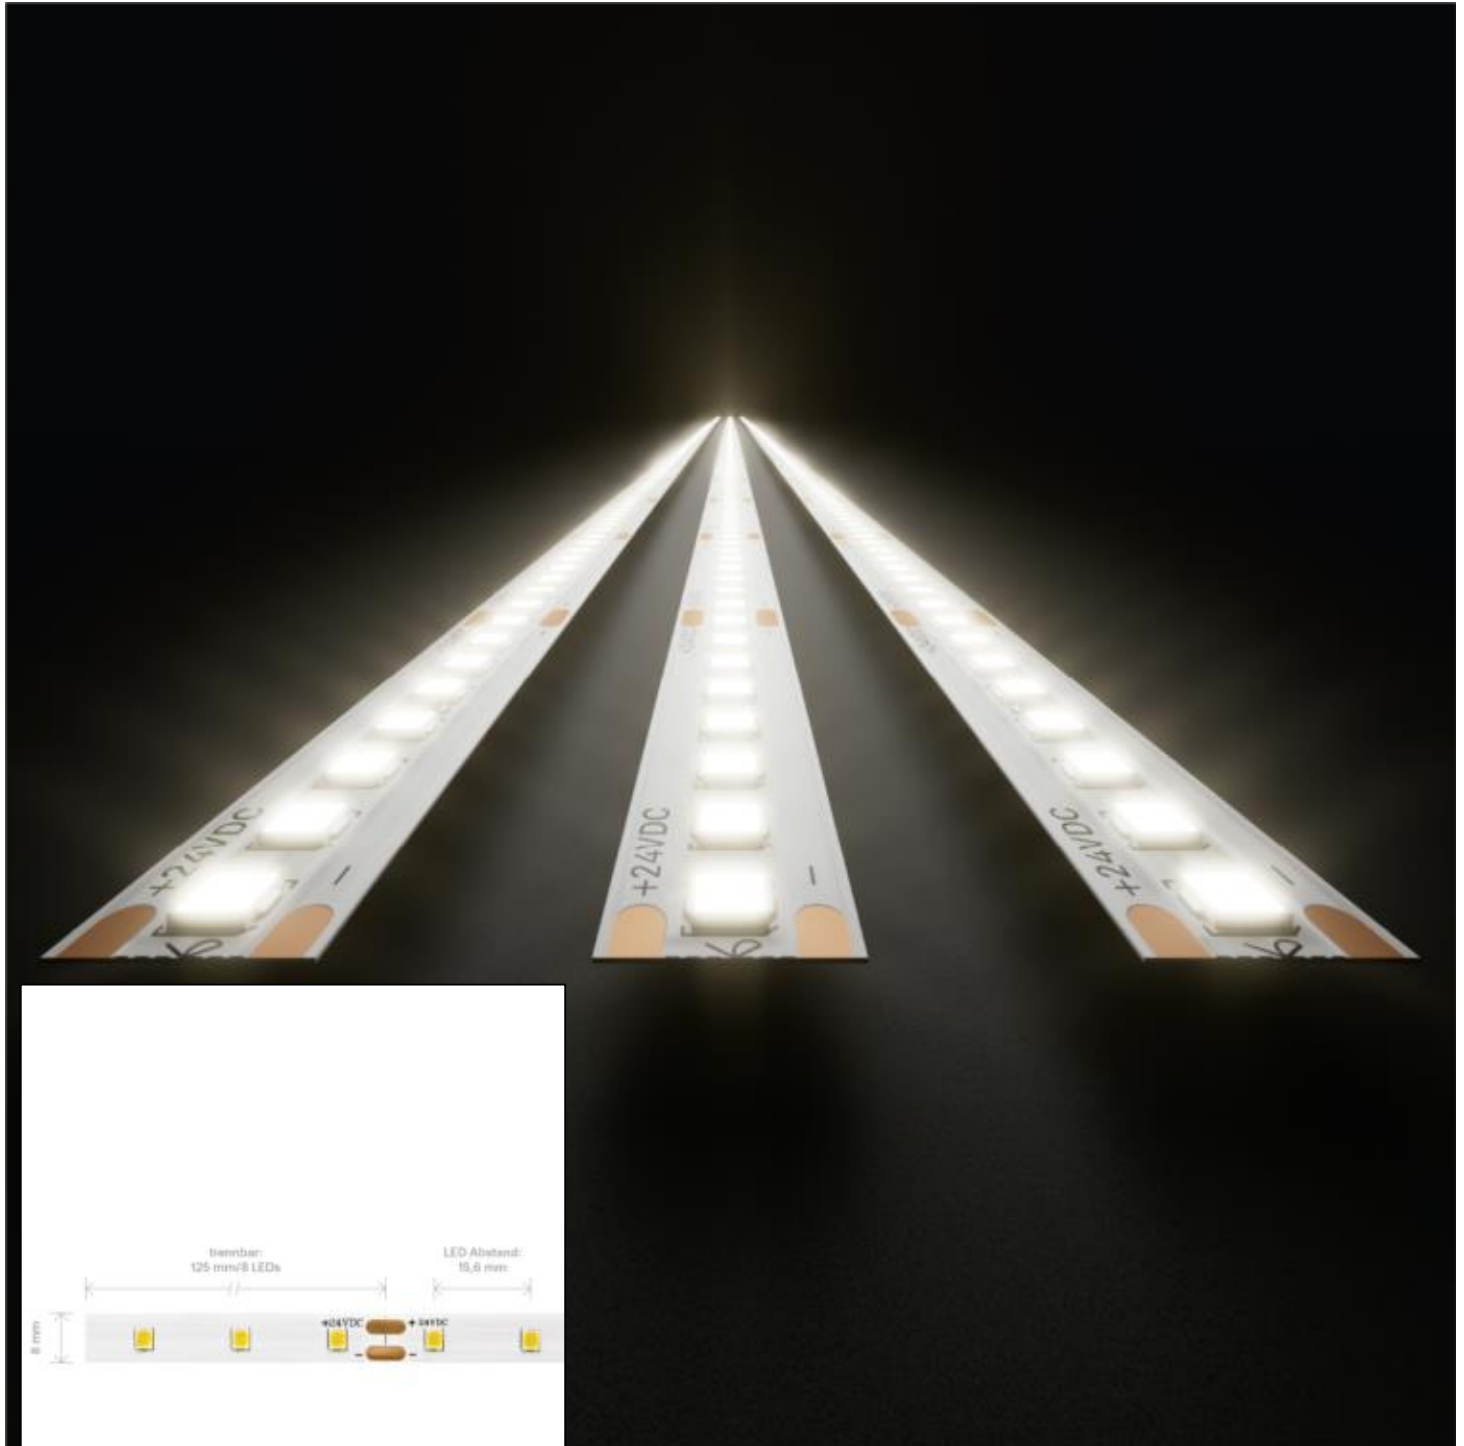

**Manual:**

[https://shop.sigor.de/media/pdf/5933501\\_manual.pdf](https://shop.sigor.de/media/pdf/5933501_manual.pdf)

as of: 05.12.2023

Page: 2

