

Datasheet 5958501

9,6W/m PRO LED-Streifen 2700K 5m


Our 9.6 W **PRO STRIP IP68** belongs to the most frequently used strip group in the upscale lighting object. Here you have access to a wide range of luminous intensities and light colors from 2.700 K to 3.000 K. A narrow binning with only 5 SDCM guarantees a homogeneous light color both on the strip and with different strips of this type. Especially important in the object: we offer 3 years warranty and vouch for the high quality workmanship and durability of these strips. For easier installation and further processing, we have given the strip a feed and a secondary feed of 1 meter each.



Dimmable: yes

6.240 lm	luminous flux
1.248 lm/m	luminous flux / m
48 Watt	rated power
9.60 Watt/m	rated power / m
24 V DC	output voltage
2700 K	colour temperature
Warmweiss-E)	colour perception
Ra>90	colour rendering
<5 sdcn	colour consistency
120°	beam angle
5.000 mm	length of strip on wheel
5.000 mm	max. strip length
12 mm	width
5 mm	height
2835	LED chipset
128 LED/m	LED chips / m
7.80 mm	LED pitch
62.50 mm	smallest cuttable unit
1000 mm	length connection cable side 1
1000 mm	length connection cable side 2
50 mm	lowest bending radius
IP68	type of protection
80 °C	max. temperature at tc test point
-40° - 80°C	temperature range in operation
no	Aluminum profile necessary for cooling?
Ø 30.000 h	nominal life time
L70B10	rated life time
0.7	lumen maintenance factor at the end of the nominal life
400 mA	nominal current
48 kWh/1000h	energy consumption

Spectral power distribution
in the range 180 - 800 nm



ENERGY

SIGOR
5958501

A
B
C
D
E
F
G

E



48
kWh/1000h

2019/2015

as of: 05.12.2023

5958501

9,6W/m PRO LED-Streifen 2700K 5m

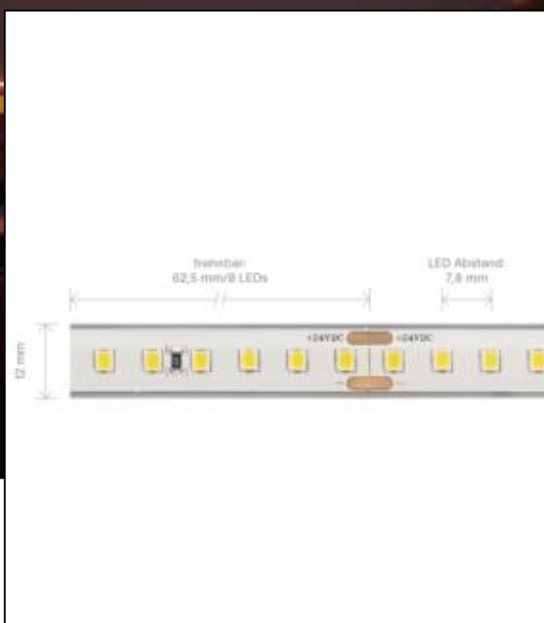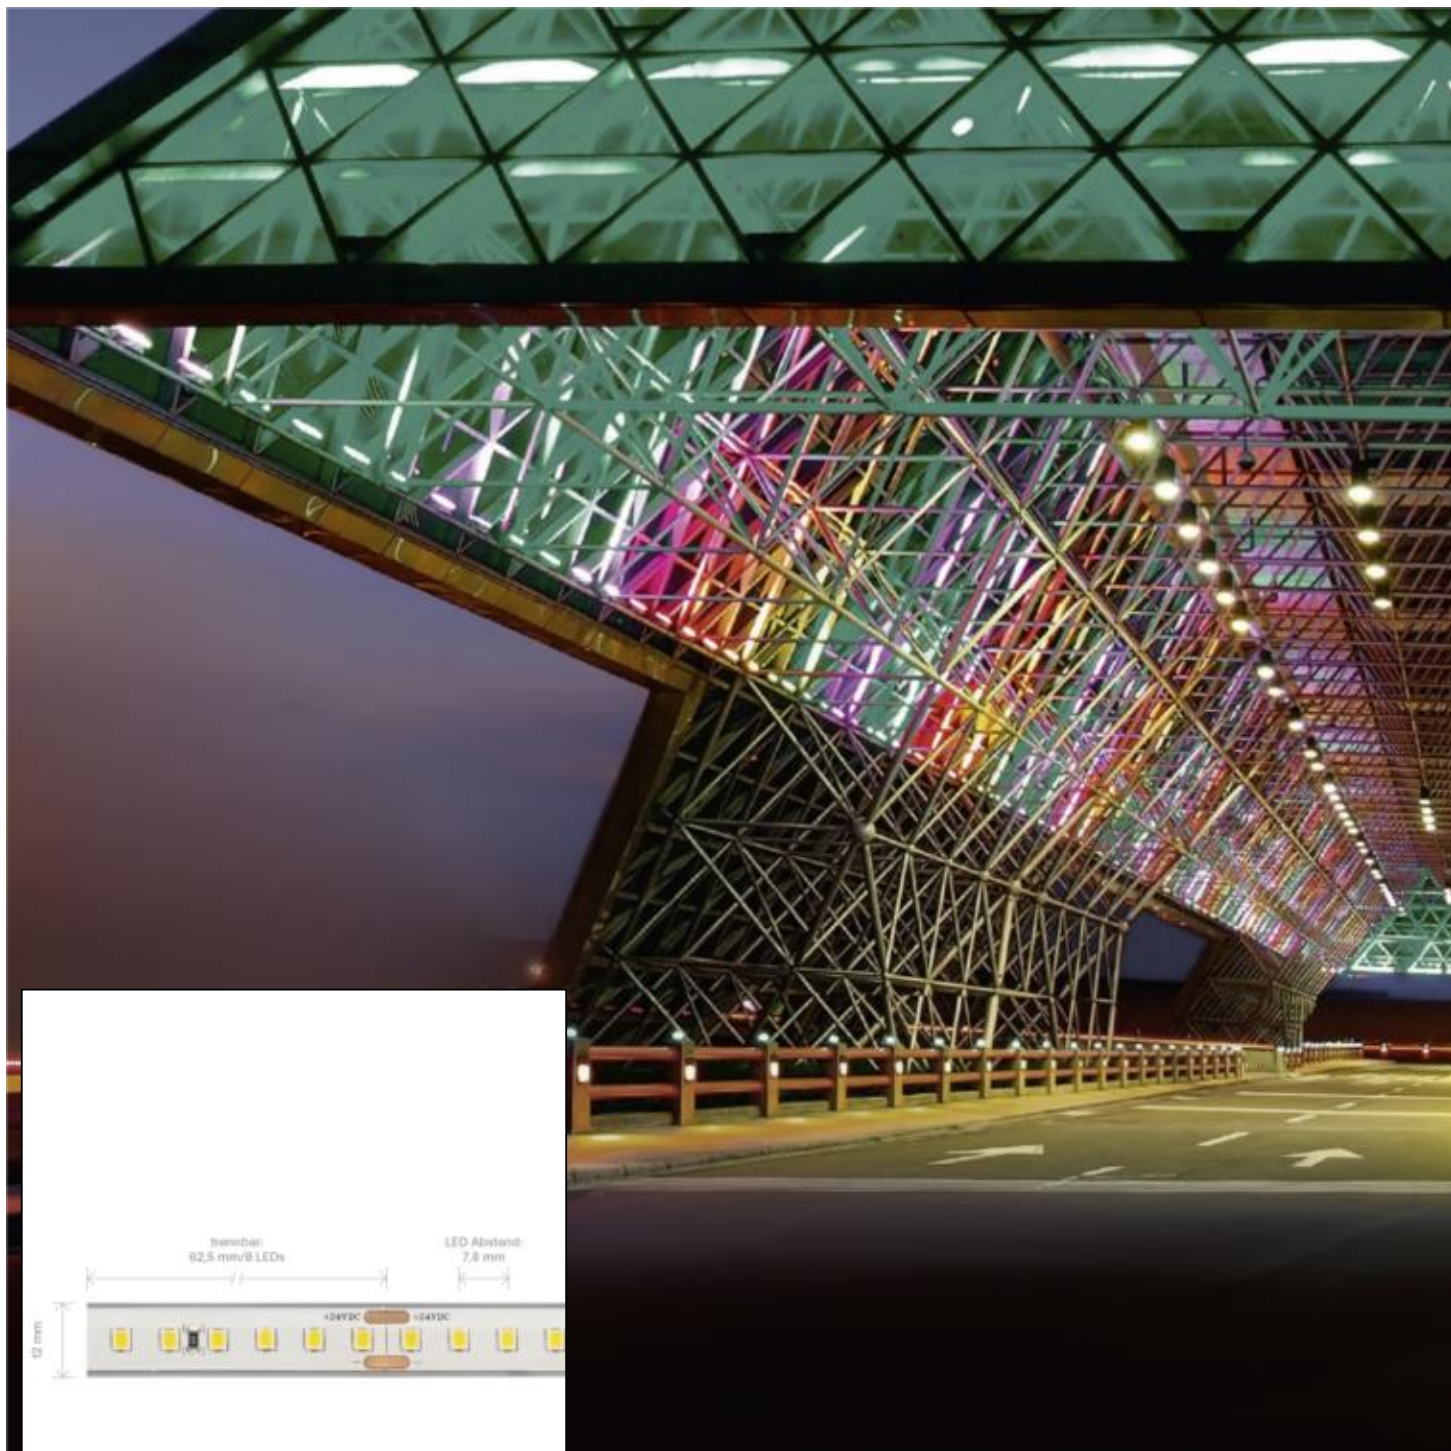

Manual:

https://shop.sigor.de/media/pdf/5958501_manual.pdf

as of: 05.12.2023

Page: 2

SIGOR Licht GmbH • Eichenhofer Weg 81 • 42279 Wuppertal
Telefon 0 23 39 - 12 61 - 0 • Telefax 0 23 39 - 12 61 61
info@sigor.de • www.sigor.de

Handelsregister HRB 19472
USt-IdNr.: DE 814574569
WEEE-Reg.-Nr.: DE 45242363

Geschäftsführer:
Michael Perterer
Robin Scheffel

