

**Datasheet**  
**5965801**

**14W/m Hochvolt LED-Streifen 4000K 25m**

Our 14W **HOCHVOLT IP65** allow completely new possibilities to realize your lighting project. This is especially due to the maximum operable length of 50 meters with only one feed to 230V.



The strips are available in two variations: 8W/m and 14W/m. You can get the high-voltage strips in the common light colors. The IP65 protection makes them excellent for outdoor use. They offer excellent color rendering of Ra > 90. You can get our high voltage strips either as 25m roll, 50m roll.


Especially important in the object: we offer 5 years warranty and vouch for the high quality workmanship and durability of these strips.



Dimmable no

33.250 lm	luminous flux
1.330 lm/m	luminous flux / m
350 Watt	rated power
14 Watt/m	rated power / m
230 V DC	output voltage
4000 K	colour temperature
Neutralweiss	colour perception
Ra>90	colour rendering
<5 sdc	colour consistency
120°	beam angle
25.000 mm	length of strip on wheel
50.000 mm	max. strip length
15 mm	width
6 mm	height
3056	LED chipset
72 LED/m	LED chips / m
13.90 mm	LED pitch
166.60 mm	smallest cuttable unit
500 mm	length connection cable side 1
0 mm	length connection cable side 2
600 mm	lowest bending radius
IP65	type of protection
70 °C	max. temperature at tc test point
-20° - 40°C	temperature range in operation
no	Aluminum profile necessary for cooling?
Ø 50.000 h	nominal life time
L70B50	rated life time
0.7	lumen maintenance factor at the end of the nominal life
0.9	power factor
60 mA	nominal current
350 kWh/1000	energy consumption

Spectral power distribution  
in the range 180 - 800 nm

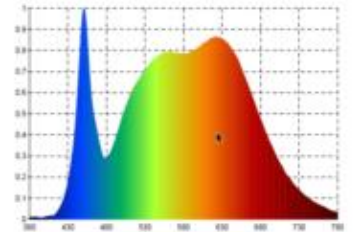

**SIGOR**  
5965801

A	Green arrow pointing right
B	Green arrow pointing right
C	Light green arrow pointing right
D	Yellow arrow pointing right
E	Orange arrow pointing right
F	Red arrow pointing right
G	Black arrow pointing left

**350**  
kWh/1000h

2019/2015

as of: 18.04.2023



5965801

14W/m Hochvolt LED-Streifen 4000K 25m



**Manual:**

[https://shop.sigor.de/media/pdf/5965801\\_manual.pdf](https://shop.sigor.de/media/pdf/5965801_manual.pdf)

as of: 18.04.2023

Page: 2