

**Datasheet**  
**9042701**

**Netzteil Powerline Micro 4W 24VDC**

Without power supply remains dark. But the power supply itself should be as invisible as possible. Our POWERLINE MICRO Triac 4Wist power supply units are flat and slim, so they fit in any niche - and even in a flush-mounting box. The new generation of Triac dimming thereby guarantees minimal installation effort.




230 V	AC Voltage
50/60 Hz	Frequency Range
200-260 V	Voltage Range AC
24-25,2 V	Voltage Range DC
0,05 mA	AC Current
4,00 W	Rated Power
75,00 %	Full Load Efficiency
0,55	Power Factor
0,50 W	Power at Standby
5;260	Inrush Current
	Dimming method
Hz	Radio frequency
0 kHz	PWM-frequency
24 V	Output voltage
5 %	Voltage Tolerance
4 W	Output Power
0,17 A	Output Current
mA	Constant Current range
50 °C	Ambient Temperature
70 °C	Storage Temperature
80 °C	Max. Housing Temp.
IP65	Ingress Protection Code
2	Protection Class
12 %	Total Harmonic distortion
h	Calculated Lifetime
50000 h	Lifetime
2 a	Guarantee
53 mm	Dimensions
27 mm	width
21 mm	height
45 g	Weight
Ja	Shortcircuit proof
Nein	Overtemperature protection
Nein	Overvoltage Protection
100000	Switching cycles




9042701

Netzteil Powerline Micro 4W 24VDC

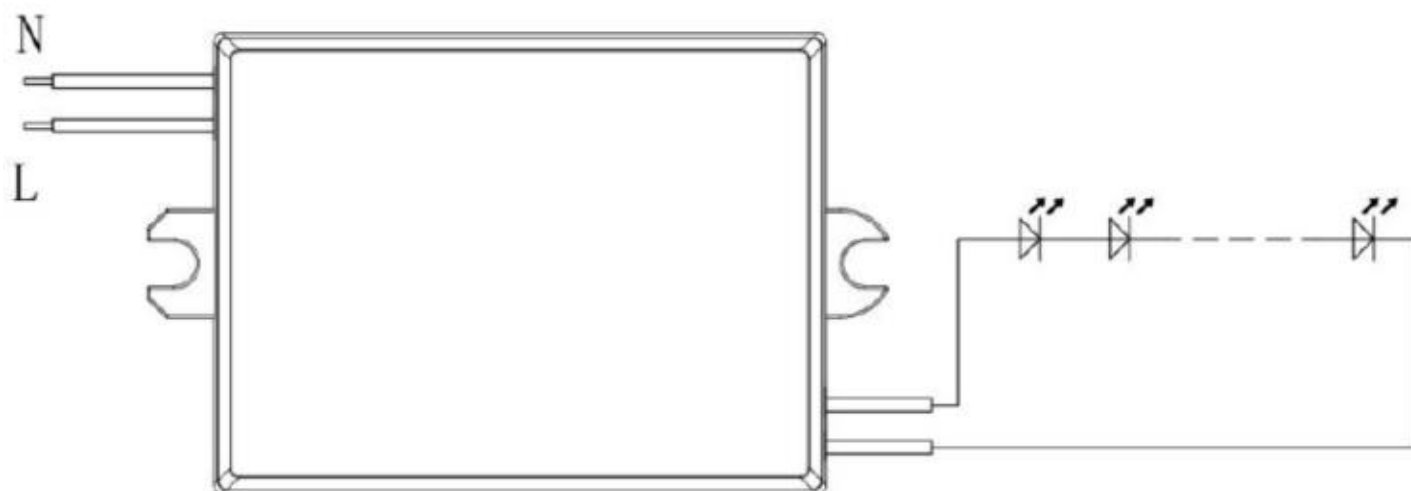

### Wiring Diagram

Terminal:	Push in terminals
Max. cable length - system:	2 m
Dimensions(LxWxH):	53 x 27 x 21 mm
Weight:	45 g

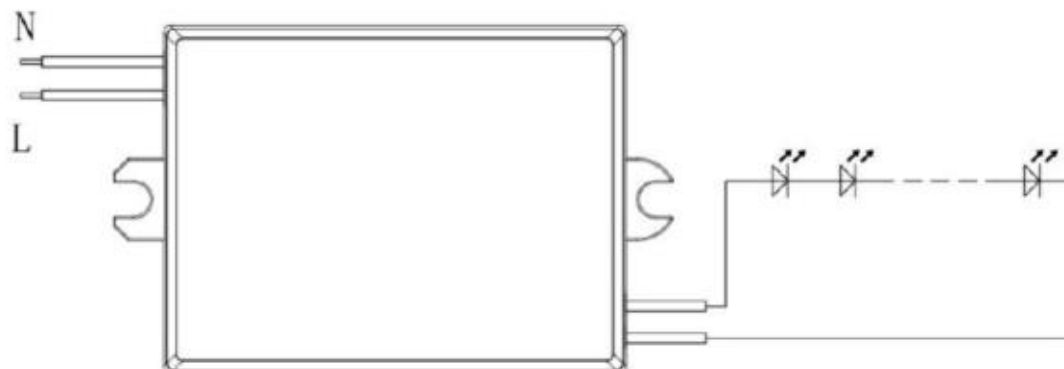

### Manual:

[https://shop.sigor.de/media/pdf/9042701\\_manual.pdf](https://shop.sigor.de/media/pdf/9042701_manual.pdf)