

Datasheet
5726801

Einbauleuchte Diled 10W 730lm 4000K dim




Dimmable yes

Our 6W **Diled Downlight** is the successor of the successful Haled series from Sigor. The unique reflector perfectly imitates that of a halogen variant. The reflector can be tilted up to 50°. Due to the high color rendering index, an almost daylight-like color rendering is guaranteed. The recessed downlight has a brilliant light color of 4,000K and makes everything shine in a beautiful light. The recessed luminaire is equipped with the latest LED technology and thus has a high dimmer compatibility. The power supply is via an integrated driver. Especially important in the object: we offer 3-year warranty and vouch for the high-quality workmanship and durability.

Recommended dimmer: www.sigor.de/dimmerliste

| | |
|--------------|---|
| 730 lm | luminous flux [lm] |
| 10,00 Watt | rated power |
| 4000 K | colour temperature |
| Ra>95 | colour rendering |
| <5 sdcms | colour consistency |
| 36° | beam angle |
| stahl | Colour housing |
| IP20 | type of protection |
| -10° - 30°C | temperature range in operation |
| 0.9 | power factor |
| 230 V AC | voltage |
| 50/60 Hz | operating frequency |
| 230 mA | current |
| 10 kWh/1000h | energy consumption |
| <1.0 s | warm-up time up to 60% of the full light output |
| <0.5 s | starting time |
| Ø 50.000 h | nominal life time |
| L80B10 | rated life time L70/B50 |
| 0.8 | lumen maintenance factor at the end of the nominal life |

Spectral power distribution
in the range 180 - 800 nm

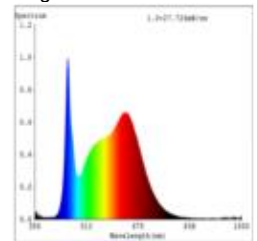

Sigor
5726801

| | |
|---|-----|
| A | |
| B | |
| C | |
| D | |
| E | |
| F | ← F |
| G | |


10
kWh/1000h

2019/2015



5726801

Einbauleuchte Diled 10W 730lm 4000K dim

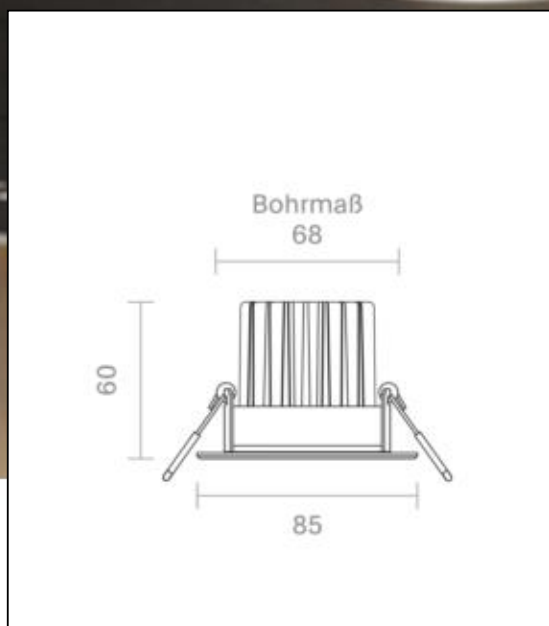

Manual:

https://shop.sigor.de/media/pdf/5726801_manual.pdf

as of: 10.10.2023

Page: 2

