

**Datasheet**  
**5426401**

**5W Argent Downlight Modul 340lm 2800-2000K 36° dim**

Our 5W **ARGENT recessed downlight** is our premium downlight product. The reflector can be tilted up to 50°. Due to the high color rendering index of Ra 90, an almost daylight-like color rendering is guaranteed. The recessed downlight has the Dim-To-Warm technology. It is characterized by the lowering of the light color when dimming from 2,800K to 2,000K, as with a traditional incandescent lamp. The recessed luminaire is equipped with the latest LED technology and thus has high dimmer compatibility. The power supply is provided by an integrated driver. The connector box provides a very practical assistance in the through wiring. Especially important in the object: we offer a 3-year warranty and vouch for the high quality workmanship and longevity.




Dimmable:

Recommended dimmer: [www.sigor.de/dimmerliste](http://www.sigor.de/dimmerliste)

340 lm	luminous flux [lm]
5,00 Watt	rated power
2800-2000 K	colour temperature
Ra>90	colour rendering
6 sdcm	colour consistency
36°	beam angle
Alu gebürstet	Colour housing
IP20	type of protection
-10° - 40°C	temperature range in operation
0.78	power factor
230 V AC	voltage
50/60 Hz	operating frequency
300 mA	current
6 kWh/1000h	energy consumption
<1,0 s	warm-up time up to 60% of the full light output
0,1 s	starting time
Ø 50.000 h	nominal life time
L70B50	rated life time L70/B50
0,7	lumen maintenance factor at the end of the nominal life

Spectral power distribution in the range 180 - 800 nm

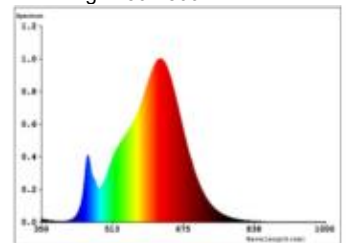

**SIGOR**  
5426401

A	
B	
C	
D	
E	
F	
G	G



**5**  
kWh/1000h

2019/2015



5426401

5W Argent Downlight Modul 340lm 2800-2000K 36° dim

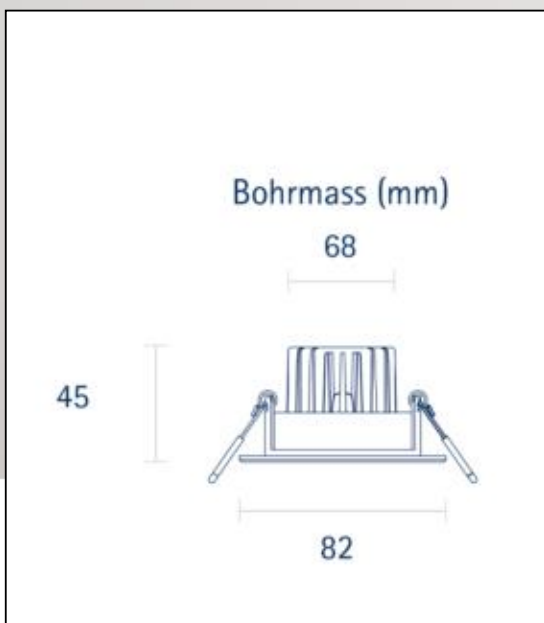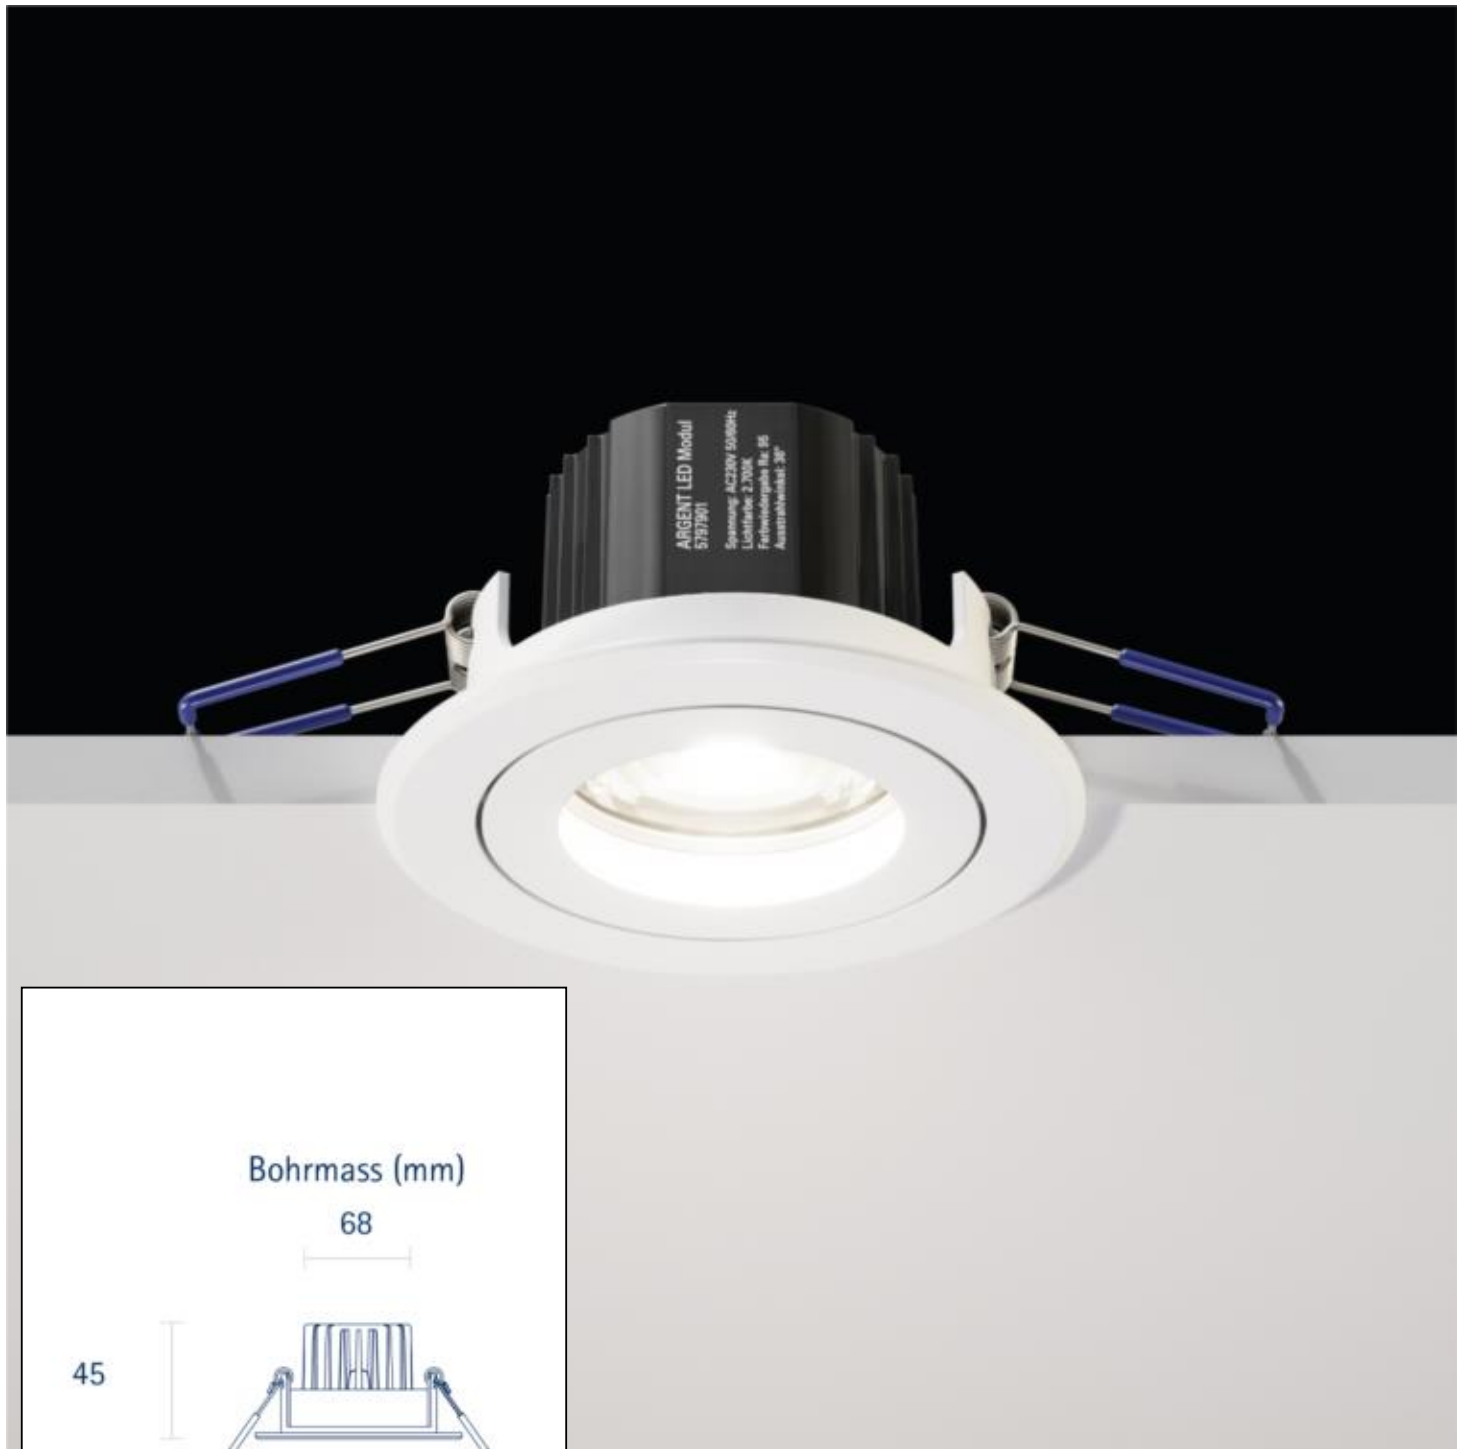

**Manual:**

[https://shop.sigor.de/media/pdf/5426401\\_manual.pdf](https://shop.sigor.de/media/pdf/5426401_manual.pdf)

as of: 06.12.2022

Page: 2