



Datasheet

5986201


10W/m ART LED-Streifen 4000K 5m


Our 10W/m **ART STRIPEN 10mm OMNI** can also be used directly in the visible range due to its three-sided light emission without recognizable light points. By the homogeneous light distribution without recognizable light points as well as the high-quality, satin polyurethane casting He needs no more cover on the profile. Heat dissipation is already provided by the PU potting and an aluminum or acrylic rail is used for mounting or guiding. The material is insensitive to acids and alkalis, so the strip can be used without hesitation in adverse environments such as swimming pools (chlorine), on ships (salt water) or in kitchens (wipe with detergents). For planned objects there is a possibility to manufacture the feeders according to the requirements on site (IP protection, UV protection, direction of the feed to the back or to the side, length of the feed etc.). ART strips are covered by a 5-year warranty for both function and polyurethane



Dimmable: yes


4.300 lm	luminous flux
860 lm/m	luminous flux / m
50 Watt	rated power
10 Watt/m	rated power / m
24 V DC	output voltage
4000 K	colour temperature
Neutralweiss	colour perception
Ra>80	colour rendering
3 sdcm	colour consistency
165°	beam angle
5.000 mm	length of strip on wheel
5.000 mm	max. strip length
10 mm	width
10 mm	height
3014	LED chipset
140 LED/m	LED chips / m
7.14 mm	LED pitch
50 mm	smallest cuttable unit
mm	length connection cable side 1
mm	length connection cable side 2
150 mm	lowest bending radius
IP68	type of protection
60 °C	max. temperature at tc test point
-20° - 45°C	temperature range in operation
Ø 54.000 h	nominal life time
L70B50	rated life time
0.7	lumen maintenance factor at the end of the nominal life
mA	nominal current
50 kWh/1000h	energy consumption / m






Sigor
5986201

A	▶
B	▶
C	▶
D	▶
E	▶
F	▶
G	▶



D

50
kWh/1000h




2019/2015

as of: 24.01.2022



5986201

10W/m ART LED-Streifen 4000K 5m

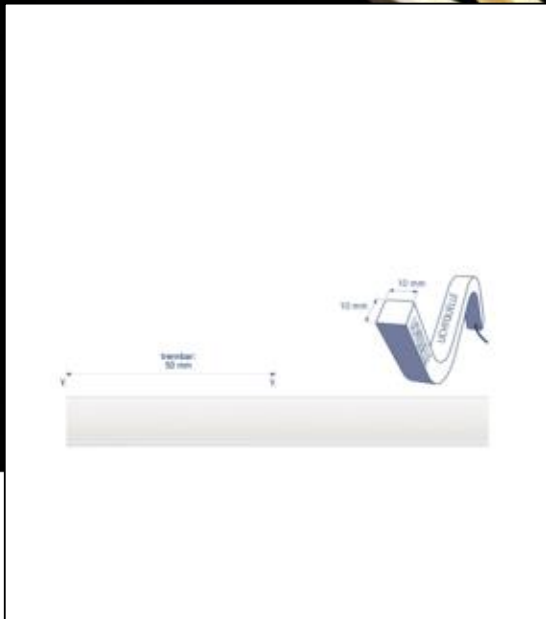

Manual:

https://shop.sigor.de/media/pdf/5986201_manual.pdf

as of: 24.01.2022

Page: 2